vtech ®

Quick start guide (Canada version)
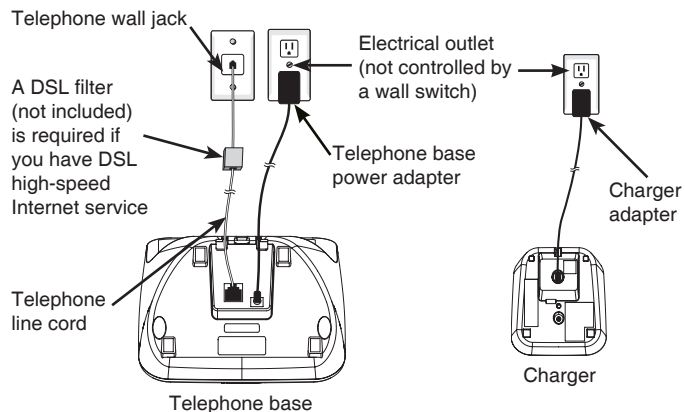## CS6124/CS6124-11/CS6124-2/
CS6124-21/CS6124-31

Introduction
This quick start guide provides you with the basic installation instructions. A limited set of features are described in abbreviated form.

Please refer to the online user's manual for complete installation and operation instructions.

Telephone base and charger installation
Install the telephone base and charger as shown below.

Telephone wall jack

A DSL filter (not included) is required if you have DSL high-speed Internet service

Electrical outlet (not controlled by a wall switch)

Telephone base power adapter

Charger adapter

Telephone line cord

Charger

Telephone base

note Use only the power adapters and batteries supplied with this product.
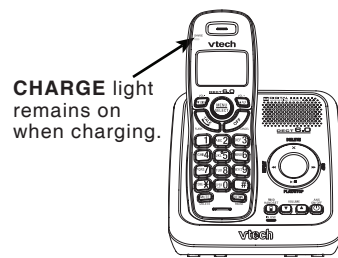
Battery installation and charging
Install the battery as shown below. Once you have installed the battery, you may be able to make and receive short calls. For best performance, charge the handset battery continuously for at least 16 hours.

1. Plug the battery connector securely into the socket.

2. Place the battery with the wires inside the battery compartment.

3. Slide the battery compartment cover towards the center of the handset until it clicks into place.

4. Charge the handset in the telephone base or charger.

CHARGE light remains on when charging.

Enter the handset menu
1. Press **MENU** when the phone is not in use.
2. Press ▼**CID** or ▲ until the screen displays the desired feature menu.
3. Press **SELECT** to enter that menu.

- To return to the previous menu, press **CANCEL**.
- To return to idle mode, press and hold **CANCEL**.

Set date and time
1. Press **MENU** when the handset is not in use.
2. Scroll to ◆**Settings** then press **SELECT**.
3. Scroll to ◆**Set date/time** then press **SELECT**.
4. Use the dialing keys (**0**-**9**) to enter the current month, date and year. Then press **SELECT**.
5. Use the dialing keys (**0**-**9**) to enter the hour and minute. Then press ▼**CID** or ▲ to select **AM** or **PM**.
6. Press **SELECT** to save.

Set number of rings
You can set the answering system to answer an incoming call after 2, 3, 4, 5 or 6 rings; or toll saver. If you choose toll saver, the answering system answers a call after 2 rings when you have new messages, or after 4 rings when you have no new messages.

1. Press **MENU** when the handset is not in use.
2. Scroll to ◆**Answering sys** then press **SELECT**.
3. Scroll to ◆**Ans sys setup** then press **SELECT**.
4. Scroll to ◆**# of rings** then press **SELECT**.
5. Press ▼**CID** or ▲ to choose **6**, **5**, **4**, **3**, **2** or **Toll saver** and then press **SELECT** to save.

Record your own announcement
You can use the preset announcement to answer calls, or replace it with your own recorded announcement. The announcement can be up to 90 seconds in length.

1. Press **MENU** when the handset is not in use.
2. Scroll to ◆**Answering Sys** then press **SELECT** twice.
3. Press **7** to record.
4. After the handset announces, *"Record after the tone. Press 5 when you are done,"* speak towards the handset microphone.
5. Press **5** when done.
6. Press **2** to play the recorded announcement; or **7** to record again if desired. Press **3** to delete the recorded announcement. Press **5** to stop the playback at any time.

IMPORTANT!
Refer to the online user's manual for a full set of installation and operation instructions. For manual download or customer service, visit our website at www.vtechcanada.com or call 1 (800) 267-7377.

96-008393-020-100