



Quick start guide (Canada version)

LS6195/LS6195-13/LS6195-15/
LS6195-16/LS6195-17


Introduction

This **Quick start guide** provides you with basic installation and setup instructions. A limited set of features are described in abbreviated form.

You may refer to the **Abridged user's manual** provided in the product package for installation and operation instructions, or see the online **Complete user's manual** at www.vtechcanada.com for complete installation and operation instructions.

Telephone base installation

Install the telephone base as shown below.

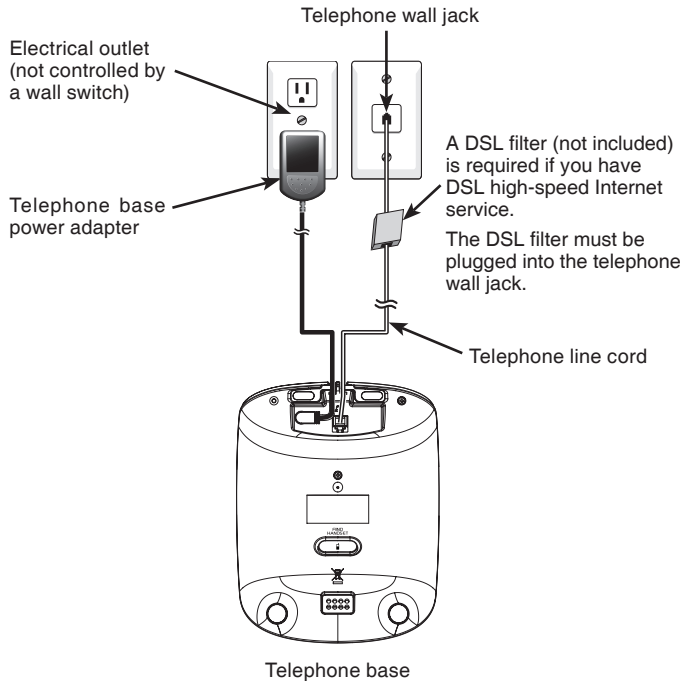



note

- Use only the power adapter and battery supplied with this product.
- If you subscribe to telephone service from a cable company or a VoIP service provider, contact your cable/VoIP service provider for more information.


Battery installation

Install the battery as shown below.

1. Plug the battery connector securely into the socket.
2. Place the battery with the label **THIS SIDE UP** facing up and the wires inside the battery compartment.



3. Slide the battery compartment cover towards the center of the handset until it clicks into place.
4. Place the handset in the telephone base to charge.



IMPORTANT:

Check for a dial tone by pressing **TALK** or **CALL**. If you hear a dial tone, the installation is successful.

If you do not hear a dial tone:

- Make sure the installation procedures described above are properly done.
- It may be a wiring problem. If you have changed your telephone service to digital service from a cable company or a VoIP service provider, the telephone line may need to be rewired to allow all existing telephone jacks to work. Contact your cable/VoIP service provider for more information.

Enter the handset menu

1. Press **MENU**.
 2. Press **▼** or **▲** until the screen displays the desired feature menu.
 3. Press **SELECT** to enter that menu.
- To return to the previous menu, press **CANCEL**.
 - To return to idle mode, press and hold **CANCEL**.

Set date and time

If you subscribe to caller ID service, the day, month and time are set automatically with each incoming call. You can also set the date and time manually.

1. Press **MENU**.
2. Scroll to **Set date/time**, then press **SELECT**.
3. Use the dialing keys (**0-9**) to enter the month, date and year, then press **SELECT**.
4. Use the dialing keys (**0-9**) to enter the hour and minute.
5. Press **▼** or **▲** to choose **AM** or **PM**, then press **SELECT**.

Set number of rings

You can choose two, three, four, five or six rings; or toll saver. With toll saver selected, the answering system answers after two rings if you have new messages, or after four rings when there are no new messages. This enables you to check for new messages and avoid paying long distance charges when calling from out of your local area.

1. Press **MENU**.
2. Scroll to **Answering sys**, then press **SELECT**.
3. Scroll to **Ans sys setup**, then press **SELECT**.
4. Scroll to **# of rings**, then press **SELECT**.
5. Press **▼** or **▲** to choose **6**, **5**, **4**, **3**, **2** or **Toll saver**.
6. Press **SELECT**.

Record your own announcement with a handset

You can use the preset announcement to answer calls, or replace it with your own recorded announcement. It can be up to 90 seconds in length.

1. Press **MENU**.
2. Scroll to **Answering sys**, then press **SELECT** twice.
3. The handset announces, "To play, press 2. To record, press 7." Then press **7** to record.
4. The handset announces, "Record after the tone. Press 5 when you are done." After the tone, speak towards the handset microphone.
5. Press **5** when done.

IMPORTANT!

Refer to the online **Complete user's manual** for a full set of installation and operation instructions. For manual download or customer service, visit our website at www.vtechcanada.com or call **1 (800) 267-7377**.