

User's manual

www.vtechcanada.com





Models: LS6425/LS6425-2/ LS6425-3/LS6425-4



Congratulations

on purchasing your new VTech product. Before using this telephone, please read **Important safety instructions** on page 68 of this manual.

This manual has all the feature operations and troubleshooting necessary to install and operate your new VTech telephone. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature rich VTech product. For support, shopping, and everything new at VTech, visit our website at www.vtechcanada.com or call 1 (800) 267-7377.



Telephones identified with this logo have reduced noise and interference when used with most T-coil equipped hearing aids and cochlear implants. The TIA-1083 Compliant Logo is a trademark of the Telecommunications Industry Association. Used under license.

Table of contents

Getting started1 Temporary tone dialing	20
Parts checklist 1 Find handset	21
Telephone installation2 Call waiting	21
Battery installation 3 Equalizer	21
Battery charging4 Redial4	2
Installation options	ry 22
Tabletop to wall mount installation 5 Delete a redial entry	22
Wall mount to tabletop installation 6 Copy a number from the rec	
Telephone base layout	22
Handset layout8 Chain dialing	23
Telephone settings11 Multiple handset use	24
Using the menu11 Join a call in progress	24
Ringer volume (telephone base) 12 Intercom	
Ringer volume (handset)	ring
Ringer tone	25
Set date and time 13 Announced transfer	
LCD language	26
Voice language 14 Push-to-talk (PTT)	
Caller ID Announce	27
Clear voicemail indicators	
Bename handset 16 PTT to multiple handsets	
Key tone 16 Answer a PTT call	
CID time synchronization	
Home area code	
Dial mode	
Website	
Telephone operation	
Make a call	
Predial a call	
Annuary 2 2 11	
About the directory	
Add a directory ordery	
Oction the directory	
Mute	34

Edit a directory entry	35 Ar
Delete a directory entry	35 An
Assign a directory entry to a	Us
speed dial location	36
Dial a speed dial entry	36 Me
Reassign a speed dial number	37 Ne
Delete a speed dial entry	37 Ca
Caller ID	38 Ca
About caller ID	Ma
Information about caller ID with	De
call waiting	38 Re
Caller ID log	1.4
Memory match	Г.
Missed call indicator	
Review the caller ID log	r
View dialing options	
Dial a caller ID log entry	
Save a caller ID log entry to the	Ex
directory	
Delete the caller ID log entries	111
Caller ID log display screen	Or
messages	42 Ma
Answering system settings	
Answering system	43
Announcement	45 -
Record your own announcement	44
Play your announcement	1111
Delete your announcement	
Answer on/off	
Call screening	
Number of rings	
Remote access code	
Message alert tone	
Message recording time	4/

Answering system operation	. 48
Answering system and voicemail	. 48
Jsing the answering system and	
voicemail together	. 48
Message capacity	
New message indication	
Call screening	
Call intercept	
Message playback	
Delete all old messages	
Record, play and delete memos	
Message window displays	
Remote access	. 54
Appendix	. 55
• •	
 Handset display screen messages	
Handset display screen messages	. 55
Handset display screen messages Handset and telephone base indicators	. 55 . 57 . 58
Handset display screen messages Handset and telephone base indicators	. 55 . 57 . 58
Handset display screen messages Handset and telephone base indicators Expand your telephone system Froubleshooting mportant safety instructions	. 55 . 57 . 58 . 66
Handset display screen messages Handset and telephone base indicators Expand your telephone system Froubleshooting mportant safety instructions Deerating range	. 55 . 57 . 58 . 59 . 66
Handset display screen messages Handset and telephone base indicators Expand your telephone system Froubleshooting mportant safety instructions Dperating range Maintenance	. 55 . 56 . 59 . 66
Handset display screen messages Handset and telephone base indicators	. 55 . 56 . 59 . 66 . 68
Handset display screen messages Handset and telephone base indicators	. 55 . 57 . 58 . 68 . 68
Handset display screen messages Handset and telephone base indicators	. 55 . 55 . 56 . 66 . 68 . 69 . 70
Handset display screen messages Handset and telephone base indicators	. 55 . 55 . 56 . 66 . 68 . 69 . 70
Handset display screen messages Handset and telephone base indicators	. 55 . 57 . 58 . 68 . 68 . 69 . 70


Parts checklist

Your telephone package contains the following items. Save your sales receipt and original packaging in case it is necessary to ship your telephone for warranty service.



Handset charger and charger adapter

(1 for LS6425-2, 2 for LS6425-3 and 3 for LS6425-4)



Telephone base power adapter



Telephone base



Handset battery compartment cover

(1 for LS6425, 2 for LS6425-2, 3 for LS6425-3 and 4 for LS6425-4)



Handset battery

(1 for LS6425, 2 for LS6425-2, 3 for LS6425-3 and 4 for LS6425-4)




Telephone line cord




(1 for LS6425, 2 for LS6425-2, 3 for LS6425-3 and

4 for LS6425-4)



Wall mount bracket



User's manual



Quick start guide

note


To purchase replacement batteries or power adapters, visit our website at www.vtechcanada.com or call 1 (800) 267-7377.

Telephone installation

Install the telephone base and charger(s) as shown below.

Make sure that the electrical outlet is not controlled by a wall switch.


If you subscribe to digital subscriber line (DSL) high-speed Internet service through your telephone line, you must install a DSL filter between the telephone line cord and the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL interference. Contact your DSL service provider for more information about DSL filters.

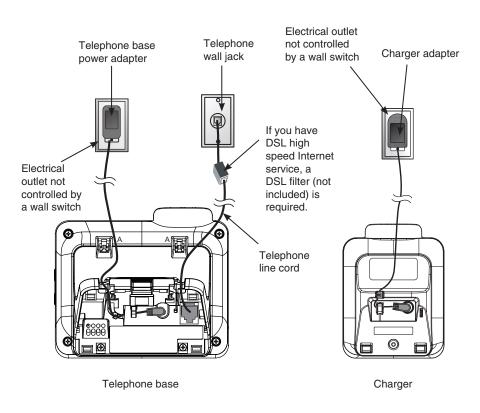

Battery installation

Install the battery as shown below.

- 1. Plug the battery connector securely into the socket inside the handset battery compartment, matching the color-coded label.
- 2. Place the battery with the label **THIS SIDE UP** facing up and the wires inside the battery compartment.
- 3. Align the cover flat against the battery compartment, then slide it towards the center of the handset until it clicks into place.
- 4. Charge the handset by placing it in the telephone base or charger. The **CHARGE** light is on when the handset is charging.

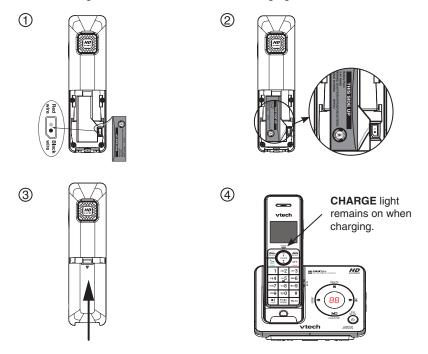

- note
- If the handset will not be used for a long time, disconnect and remove the battery to prevent possible leakage.
- To purchase replacement batteries, visit our website at www.vtechcanada.com or call 1 (800) 267-7377.

Battery charging

Once you have installed the battery, the screen indicates the battery status (see the table below).



- For best performance, keep the handset in the telephone base or charger when not in use.
- The battery is fully charged after 10 hours of continuous charging.
- If you place the handset in the telephone base or the charger without plugging in the battery, the screen displays **No battery**.

Battery indicators	Battery status	Action
The screen is blank, or displays Place in charger and [] flashes.	Battery has no or very little charge. The handset cannot be used.	Charge without interruption (about 30 minutes).
The screen displays Low battery and [] flashes.	Battery has enough charge to be used for a short time.	Charge without interruption (about 30 minutes).
The screen displays HANDSET X.	Battery is charged.	To keep the battery charged, place it in the telephone base or charger when not in use.

When the battery is fully charged, you can expect the following performance:

Operation	Operating time
While in handset use (talking*)	Up to seven hours
While in speakerphone mode (talking*)	Up to five hours
While not in use (standby**)	Up to seven days

^{*}Operating times vary depending on your actual use and the age of the battery.

After you install your telephone or power returns following a power outage, the handset will prompt you to set the date and time (see page 13). To skip setting the date and time, press **off/CANCEL**.

MM/00/44/

Ĥ


^{**}Handset is not charging or in use.

Installation options

Your telephone base is ready for tabletop use. If you want to mount your telephone on a wall, use the provided wall mount bracket to connect with a standard dual-stud telephone wall mounting plate. If you do not have this mounting plate, you can purchase one from many hardware or consumer electronics retailers. You may need a professional to install the mounting plate.


Tabletop to wall mount installation

- Plug one end of the telephone line cord into the TEL LINE jack on the bottom of the telephone base. Plug the small end of the power adapter into the POWER jack on the bottom of the telephone base.
- Position the lower portion grooves on the telephone base to the lower portion tabs (marked A) on the wall mount bracket. Make sure the upper portion grooves of the telephone base are above the upper portion tabs on the wall mount bracket.
- 3. Route the telephone line cord through the wall mount bracket hole and plug it into the telephone wall jack. Route the power cord out of the bottom of the telephone and plug it into an electrical outlet not controlled by a wall switch.
- 4. Align the holes on the bracket with the standard wall plate and slide the bracket down until it locks securely. Bundle the telephone line cord and power adapter cord neatly with twist ties.

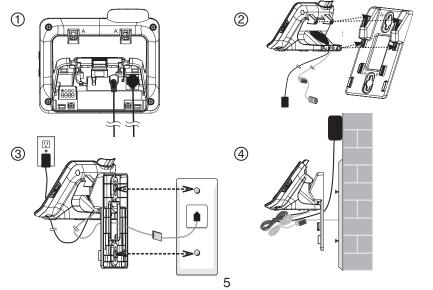


Wall mount to tabletop installation

- 1. If the telephone line cord and power adapter cord are bundled, untie them first.
- Push the black wall mount bracket up and remove it from the wall plate. Unplug the telephone line cord (or DSL filter) from the wall. Unplug the power adapter from the power outlet.
- 3. Push the wall mount bracket down to remove it from the telephone base.
- 4. See Telephone installation on page 2.

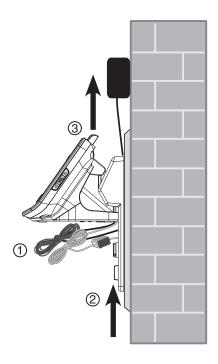

Telephone base layout

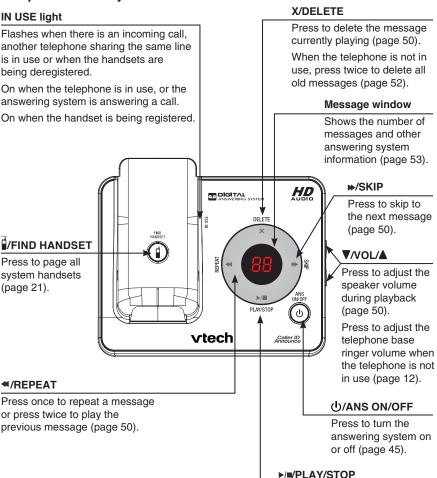

Press to play messages or press to stop message playback (page 50).

Handset layout

CHARGE light

On when the handset is charging in the telephone base or charger (page 3).

Press to enter the directory when the telephone is not in use (page 34).

While in a menu, press to scroll up.

During a call or message playback, press to increase the listening volume (page 19 or page 51).

When entering numbers or names in the directory, press to move the cursor to the right.

MUTE/DELETE

While on a call, press to mute the microphone (page 20).

While reviewing the redial list, directory or caller ID log, press to delete an individual entry (pages 22, 35 and 42 respectively).

While the handset is ringing, press to silence the ringer temporarily (page 20).

While predialing, press to delete digits (page 19).

TALK/FLASH

Press to make or answer a call (page 19).

During a call, press to answer an incoming call when you receive a call waiting alert (page 21).

1


While reviewing a caller ID log entry, press repeatedly to add or remove 1 in front of the telephone number before dialing or saving it in the directory (page 40).


TONE X

With the phone set for pulse dialing, press to temporarily change to tone dialing while on a call (page 20).

Press to make or answer a call (page 19).

During a call, press to switch between the speakerphone and the handset (page 19).

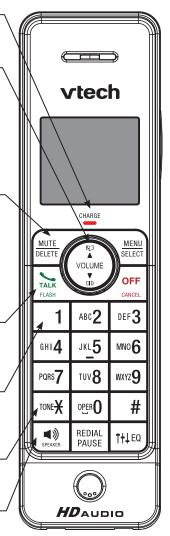

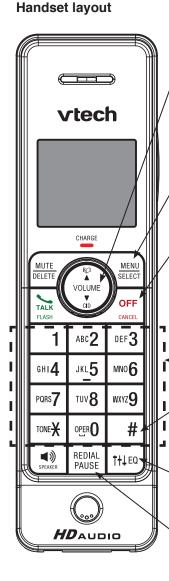

CID/▼/VOLUME (caller ID/volume)

Press to review the caller ID log when the telephone is not in use (page 40).

While in a menu, press to scroll down.

During a call or message playback, press to decrease the listening volume (page 19 or page 51).

When entering numbers or names in the directory, press to move the cursor to the left.

MENU/SELECT

Press to show the menu.

While in a menu, press to choose an item, or save an entry or setting.

OFF/CANCEL

During a call, press to hang up (page 19).

While the handset is ringing, press to silence the ringer temporarily (page 20).

While the telephone is not in use, <u>press and hold</u> to delete the missed call indicator (page 40).

While in a menu, press to go back to the previous menu. While in a menu, press and hold to return to idle mode.

Dialing keys

Press to enter numbers or characters.

(pound key)

Press repeatedly to show other dialing options when reviewing a caller ID log entry (page 40).

When saving caller ID log entries to the directory, press to switch the name order (page 41).

††↓EQ


During an outside call, intercom call, message or announcement playback, press to change the audio quality to best suit your hearing (page 21).

REDIAL/PAUSE

Press to review the redial list (page 22).

While predialing or entering numbers into the directory, press and hold to insert a dialing pause (page 33).

Getting started Handset layout

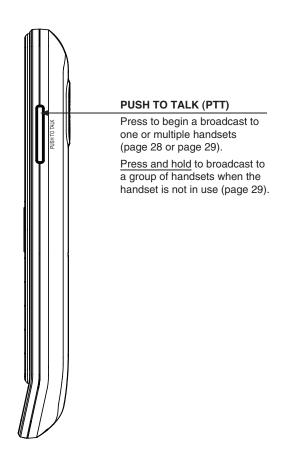

Using the menu

In the ringers menu, you can select the ringer tones and adjust the ringer volume for incoming calls.

In the settings menu, you can change and edit the settings for LCD language, voice language, announce caller ID, voicemail indicators, handset name, key tone, CID time synchronization, home area code and dial mode.

Go to **Answering system settings** starting on page 43 for instructions on how to use a system handset to modify the answering system settings shown below.

Setting	Page
Announcement (record, play and delete)	43-44
Answer on/off	45
Call screening	45
Number of rings	46
Remote access code	46
Message alert tone	47
Message recording time	47

To enter the handset menu:

- 1. Press MENU/select when the handset is not in use.
- 2. Press ▼ or ▲ until the screen displays the desired feature menu.
- Press MENU/SELECT to enter that menu.
- To return to the previous menu, press off/CANCEL.
- To return to idle mode, press and hold off/CANCEL.

Ringer volume (telephone base)

Press ▲VOL or ▼VOL on the right side of the telephone base to adjust the ringer volume when the telephone is not in use. When you set the base ringer volume to off, the message window displays 0 and the system announces, "Base ringer is off." When the telephone is ringing, press ▼VOL to temporarily turn the base ringer off.

Ringer volume (handset)

You can set the ringer volume or turn the ringer off. When the ringer is off, **Ringer off** and $\frac{1}{2}$ appear on the screen.

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Ringers, then press MENU/SELECT.
- Press MENU/SELECT to select >Ringer volume.
- Press ▼ or ▲ to sample each volume level.
- 5. Press MENU/SELECT to save your selection and return to the previous menu. You hear a confirmation tone.







- The ringer volume also determines the ringer volume of intercom calls and paging tone. However, paging volume ranges from levels 4 to 6 only.
- If the ringer volume is set to off, the handset displays **Caller ID won't be announced** when you save the setting. The caller ID will not be announced when you have an incoming call (page 14).

Ringer tone

You can choose from different ringer tones for each handset.

- 1. Press MENU/select when the handset is not in use.
- 2. Press ▼ or ▲ to highlight >Ringers, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Ringer tone, then press MENU/SELECT.
- Press ▼ or ▲ to sample each ringer tone.
- 5. Press **MENU/SELECT** to save your selection and return to the previous menu. You hear a confirmation tone.

note

If you turn off the ringer volume, you will not hear ringer tone samples.





Set date and time

The answering system announces the date and time of each message prior to playing it. Before using the answering system, set the date and time as follows. If you subscribe to caller ID service, the day, month and time are set automatically with each incoming call. However, the year must be correct so that the day of the week can be calculated from the caller ID information. You can also turn off the date and time settings of the caller ID service (see **CID time synchronization** on page 17) and set the date and time manually.

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Set date/time, then press MENU/SELECT.
- When the month is flashing, press ▼ or ▲ until the screen displays the correct month. Press MENU/SELECT to confirm.

-OR-

Use the dialing keys (0-9) to enter the current month (for example, if the month is March, you must enter 03).

- 4. Repeat Step 3 to set the correct date and year and then press MENU/SELECT to advance to set the time.
- 5. Repeat Step 3 until the time is set. Press ▼ or ▲ to select AM or PM, or press 2 for AM or 7 for PM.
- Press MENU/SELECT to save the settings and return to the previous menu. You hear a confirmation tone.
- note
- If the date and time are not set when a message is recorded, the system announces, "Time and date not set," before each message plays.
- The telephone plays two beeps if you enter an invalid number.

LCD language

You can select a language (English, French or Spanish) to be used in all screen displays.

- Press MENU/select when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- 3. Press MENU/SELECT to select >LCD language.
- 4. Press **▼** or **△** to highlight **English**, **Français** or **Español**.
- 5. Press **MENU/SELECT** to save your selection and return to the previous menu. You hear a confirmation tone.









Voice language

You can select English or French to be used for the voice prompts in your answering system or caller ID announce feature. The voice language is preset to English.

- 1. Press MENU/select when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Voice language, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Answering sys or >Caller ID anno, then press MENU/SELECT.
- Press ▼ or ▲ to select >English or >Français.
- 6. Press **MENU/SELECT** to save your selection and return to the previous menu. You hear a confirmation tone.









Caller ID Announce

The caller ID announce feature lets you know who's calling without having to look at the display. When you have an incoming call, the handset and/or base announces the caller's name based on the directory or caller ID information. If the caller's name is private or unknown, the phone number will be announced. If the caller's phone number is also private or unknown, no caller information will be announced. If the telephone number has over 11 digits, only the last 11 digits will be announced. Unless you change it, the caller ID announce feature is already turned on.

- 1. Press **MENU/select** when the handset is not in use.
- 2. Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Annc Caller ID, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >HANDSET or >BASE, then press MENU/SELECT.
- 5. Press ▼ or ▲ to choose >On or >Off.
- 6. Press **MENU/SELECT** to save your selection and return to the previous menu. You hear a confirmation tone.









- To use the caller ID announce feature, you must subscribe to caller ID service from your telephone service provider.
- The caller ID announce is muted when you turn the ringer off.
- Only the first four registered handsets are able to use the caller ID announce feature.
- It takes at least 2 rings for the phone to receive caller ID information and announce it. If the phone is answered before the end of the second ring, it will not have time to announce the caller ID information.
- Pronunciation of names may vary with this feature. Not all names may be pronounced correctly.

Clear voicemail indicators

If you subscribe to voicemail service offered by your telephone service provider, **New voicemail** and appear on the handset when you have new voicemail messages. Contact your telephone service provider for more information and assistance about using your voicemail service.

After you have listened to all new voicemail messages, the indicators on the handset turn off automatically.

Use the clear voicemail feature when the telephone indicates that there is new voicemail but there are none (for example, when you have accessed your voicemail while away from home). Clearing the voicemail waiting indicator only

turns off the indicators; it does not delete your voicemail messages. As long as you have new voicemail messages, your telephone service provider continues to send the signal to turn on the indicators.

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- 3. Press ▼ or ▲ to highlight >CIr voicemail, then press MENU/SELECT. The screen displays Turn off indicator?
- Press MENU/SELECT to confirm and return to the previous menu. You hear a confirmation tone.



HANDSET




- Your telephone service provider may alert you of new messages with a stutter (broken) dial tone. Contact your telephone service provider for details.
- Voicemail is different from answering system messages recorded in your cordless phone's answering system. For more information about the difference, see page 48.

Rename handset

You can change the name for each registered handset. The name can be up to 11 characters.

- 1. Press MENU/SELECT when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Rename handset, then press MENU/SELECT.
- 4. Use the dialing keys to enter a name.
 - Press MUTE/DELETE to delete a character.
 - Press and hold MUTE/DELETE to delete all characters.
 - Press ▼ or ▲ to move the cursor to the left or right.
- Press MENU/SELECT to save the name and return to the previous menu. You hear a confirmation tone.



Key tone

You can adjust the key tone volume or turn it off for each handset. If you turn the key tone off, there are no beeps when you press the handset keys.

- 1. Press MENU/SELECT when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Key tone, then press MENU/SELECT.
- 4. Press ▼ or ▲ to select the desired volume or Off.
- 5. Press **MENU/SELECT** to save your selection and return to the previous menu. You hear a confirmation tone.







CID time synchronization

This feature allows the time and date to be set by incoming caller ID information.

The default setting is On.

- 1. Press MENU/SELECT when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >CID time sync, then press MENU/SELECT.
- 4. Press **▼** or **△** to choose **>On** or **>Off**.
- 5. Press MENU/SELECT to save your selection and return to the previous menu. You hear a confirmation tone.



Home area code

If you dial your local calls using only seven digits (area code not required), you can program your home area code so that when you receive a call within your local area, the telephone number is automatically stored without the area code in the caller ID log.

- 1. Press MENU/SELECT when the handset is not in use.
- 2. Press **▼** or **△** to highlight **>Settings**, then press **MENU/SELECT**.
- Press ▼ or ▲ to highlight >Home area code, then press MENU/SELECT. The screen displays Only for 7digit dial from CID, then advances to home area code edit mode.
- 4. Use the dialing keys to enter a three-digit home area code.
 - Press MUTE/DELETE to delete a digit.
 - Press and hold MUTE/DELETE to delete all digits.
 - Press ▼ or ▲ to move the cursor to the left or right.
- Press MENU/SELECT to save. You hear a confirmation tone.
 The screen displays Area code will not show in CID, then automatically turns to the previous menu.





note

If, in the future, your telephone service provider requires you to dial the area code when making a local call, or, if you move to a location that requires it, delete the home area code you have already programmed, following the steps above. After you have deleted the home area code, _ _ _ will appear on the display.

Dial mode

The dial mode is preset to tone dialing. If you have pulse (rotary) service, you must change the dial mode to pulse dialing before using the telephone making a call.

- 1. Press MENU/SELECT when the handset is not in use.
- Press ▼ or ▲ to highlight >Settings, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Dial mode, then press MENL/SELECT.
- Press ▼ or ▲ to choose >Tone or >Pulse.
- 5. Press MENU/SELECT to save your selection and return to the previous menu. You hear a confirmation tone.







While on a call in pulse dialing mode, press $\mbox{\ ^{\tiny IM}$}\mbox{\ X}$ to temporarily change to tone dialing mode.

Website

Use this feature to view the VTech website address.

- Press MENU/select when the handset is not in use.
- Press ▼ or ▲ to highlight >Website, then press MENU/SELECT. The screen displays the website address.





Make a call


- 1. Press ¬FLASH or SPEAKER on the handset.
- 2. When you hear a dial tone, dial the number.


Predial a call

- 1. Dial the number on the handset.
- 2. Press TALY FLASH Or)/SPEAKER.

Answer a call

Press ★FLASH, ♥ WSPEAKER or any dialing key (0-9, # or  on ★) on the handset to answer a call.





End a call

Press **OFF/cancel** on the handset or place the handset in the telephone base or charger.



- The handset shows the elapsed time as you talk (in hours, minutes and seconds).
- When predialing (preview numbers before dialing), press mute/DELETE to backspace and delete a digit; press and hold REDIAL/PAUSE to insert a dialing pause (a p appears).
- The handset displays Unable to call. Line in use if you predial a number while your telephone line is in use.

Speakerphone

When the handset is on a call, press **SPEAKER** to switch between the speakerphone and the handset. When the speakerphone is active, the handset displays **Speaker** and **Speaker**.

Listening volume

During a call, press **▼//OLUME** or **▲//OLUME** on the handset to adjust the listening volume.



Mute

The mute function allows you to hear the other party but the other party cannot hear you.

- During a call, press MUTE/DELETE. The handset displays
 Muted for a few seconds and MUTE displays until the mute
 function is turned off.
- Press MUTE/DELETE again to resume the conversation. The handset screen temporarily displays Microphone ON.



Temporary ringer silencing

When the telephone is ringing, press **OFF/cancel** or **MUTE/DELETE** to temporarily silence the ringer on that handset only. The handset displays **Ringer muted** and \triangle . This turns off the ringer without disconnecting the call. The next call rings normally at the preset volume.



Each handset rings when there is an incoming call unless the ringer volume is turned off on that handset.

Temporary tone dialing

If you have pulse (rotary) service only, you can switch from pulse to tone dialing temporarily during a call. This is useful if you need to send touch-tone signals to access your telephone banking or long distance services.

- 1. During a call, press ™ ★ on the handset.
- Use the dialing keys to enter the number you wish to dial. The telephone sends touch-tone signals. The telephone automatically returns to pulse dialing mode after you end the call.

Find handset

This feature helps you find misplaced handsets.

To start the paging tone:

Press #/FIND HANDSET on the telephone base. All idle handsets ring, the handset screens display
 ** Paging **.

To end the paging tone:

To end the paging tone, press TALK/FLASH, ■ WSPEAKER, any dialing key (0-9, #, TONE X) on the handset or press
 I/FIND HANDSET on the telephone base.





- Press OFF/CANCEL or MUTE/DELETE to temporarily turn off the paging tone on the handset. Its screen shows Ringer muted and ♣.
- All registered handsets ring when being paged even if the ringer volume is set to off.

Call waiting

If you subscribe to call waiting service from your telephone service provider, you hear an alert tone when there is an incoming call while you are on another call.


- Press TALK/FLASH to put your current call on hold and take the new call.
- Press TALK/FLASH at any time to switch back and forth between calls.

Equalizer

The equalizer feature on the handset enables you to change the audio quality of the handset to best suit your hearing.

While on a call or intercom call, or listening to a message or announcement, press ††↓EQ to select the equalizer setting **Treble 1**, **Treble 2**, **Bass** or **Natural** (the default setting) for the handset.

The current setting is displayed on the handset briefly.



Redial

Each system handset stores the last 10 dialed numbers. Entries are shown in reverse chronological order. When there are already 10 entries, the oldest entry is deleted to make room for the new entry. When you access the redial list with no records, the handset plays two beeps and shows **Redial empty**.

Review and dial a redial entry

- 1. Press REDIAL/PAUSE to enter the redial list.
- 2. Press **▼**, **▲** or **REDIAL/PAUSE** repeatedly to browse.

REDIAL #1/8 880-267-7377 **♦ (**

-OR-

- 1. Press TALE/FLASH or SPEAKER.
- 2. Press REDIAL/PAUSE.
- Press ▼, ▲ or REDIAL/PAUSE repeatedly to browse.
- 4. When the desired entry displays, press MENU/SELECT.

Delete a redial entry

- 1. Press REDIAL/PAUSE to enter the redial list.
- 2. Press ▼, ▲ or press REDIAL/PAUSE repeatedly to browse to the desired entry.
- 3. Press MUTE/DELETE to delete the displayed entry. You hear a confirmation tone.

Copy a number from the redial list to the directory

- 1. Press REDIAL/PAUSE to enter the redial list.
- Press ▼, ▲ or REDIAL/PAUSE repeatedly to browse to the desired entry, then
 press MENU/SELECT. The screen displays EDIT NUMBER.
- 3. Use the dialing keys (0-9) to edit the number (up to 30 digits).
 - Press mute/DELETE to backspace and delete a digit.
 - Press and hold MUTE/DELETE to delete all digits.
 - Press ▼ or ▲ to move the cursor to the left or right.
 - Press and hold REDIAL/PAUSE to insert a dialing pause (a p appears).
- Press MENU/SELECT to move on to the name. The screen displays ENTER NAME.
- 5. Use the dialing keys to enter a name (up to 15 characters).
 - Press 0 to add a space.
 - Press MUTE/DELETE to backspace and delete a character.
 - Press and hold MUTE/DELETE to delete all characters.
 - Press ▼ or ▲ to move the cursor to the left or right.
- Press MENU/SELECT to save the entry. The handset shows Saved and you hear a confirmation tone.

Chain dialing

Use this feature to initiate a dialing sequence from numbers stored in the directory, caller ID log or redial list while you are on a call.

Chain dialing can be useful if you wish to access other numbers (such as bank account numbers or access codes) from the directory, caller ID log or redial list.

To access a number from the directory while on a call:

- Press MENU/SELECT.
- Press ▼ or ▲ to highlight >Directory, then press MENL/SELECT.
- Press ▼ or ▲ to scroll to the desired entry.
- 4. Press MENU/SELECT to dial the displayed number.

To access a number from the caller ID log while on a call:

- 1. Press MENU/SELECT.
- Press ▼ or ▲ to highlight >Caller ID log, then press MENU/SELECT.
- Press ▼ or ▲ to scroll to the desired entry.
- 4. Press MENU/SELECT to dial the displayed number.

To access a number from the redial list while on a call:

- 1. Press REDIAL/PAUSE to enter the redial list.
- 2. Press **▼**, **▲** or **REDIAL/PAUSE** repeatedly to browse to the desired entry.
- 3. Press MENU/SELECT to dial the displayed number.







Join a call in progress

The telephone base supports four system handsets at a time on an outside call. You can buy additional expansion handsets (**LS6405**) for this telephone base. You can register up to 12 handsets to the telephone base.

To share an outside call:

- When a handset is already on a call, you can join the call by pressing
 _{TALT}/FLASH or ■)/SPEAKER on your handset.
- To exit the call, press OFF/canceL or place the handset in the telephone base or charger. The call will not end until all handsets hang up.

Intercom

Use the intercom feature for conversations between two handsets. This feature is available only if you have two or more handsets.

 When the handset is not in use, press MENU/SELECT. Press ▼ or ▲ to highlight >Intercom, then press MENU/SELECT.

-OR-

Press ¬KL/FLASH or ¬SPEAKER, then press MENU/SELECT. Press ▼ or ▲ to highlight >Intercom, then press MENU/SELECT.

- If you have two handsets, your handset displays **Calling other handset**.
- If you have three or more handsets, your handset displays INTERCOM TO: Use the dialing keys to enter a handset number (1-9 for handsets 1-9, ™ ★ and 0 for handset 10, ™ ★ and 1 for handset 11, ™ ★ and 2 for handset 12 or ™ ★ and # for all handsets), or press ▼ or ▲ to scroll to the desired handset then press MENU/SELECT. Your handset displays

Calling HANDSET X (X represents the destination handset number) or Calling all handsets.

The other handset rings and its screen displays **Other handset is calling** or **HANDSET Y is calling** (**Y** represents the originating handset number).

- 3. To end the intercom call, either party presses **OFF/cancel** or places the handset in the telephone base or charger. Both handsets display **Intercom ended**.

note

- You can cancel the intercom call before it is answered by pressing OFF/cancel.
- If the other handset does not answer the intercom call within 100 seconds, or
 if it is accessing the answering system, is out of range, or has no power, your
 handset displays No answer. Try again and returns to idle mode.
- Only one intercom call can be established with two handsets at a time.

Answer an incoming call during an intercom call

If you receive an incoming outside call during an intercom call, there will be an alert tone.

- To answer the call, press TALK/FLASH on the handset. The intercom call ends automatically.
- To end the intercom call without answering the incoming call, press
 OFF/CANCEL on the handset. The telephone continues to ring.

Announced transfer

Use the intercom feature to transfer an outside call to another system handset.

- 1. When the handset is on a call, press **MENU/select**.
- Press ▼ or ▲ to scroll to >Intercom, then press MENU/SELECT. The outside call
 is put on hold automatically.
 - If you have two handsets, your handset displays Calling other handset.
 - If you have three or more handsets, your handset displays INTERCOM TO: Use the dialing keys to enter a handset number (1-9 for handsets 1-9, ™ ★ and 0 for handset 10, ™ ★ and 1 for handset 11, ™ ★ and 2 for handset 12 or ™ ★ and # for all handsets), or press ▼ or ▲ to scroll to the desired handset then press MENU/SELECT. Your handset displays Calling HANDSET X (X represents the destination handset number) or Calling all handsets.
- 4. From this intercom call, you have the following options:
 - To transfer the call, press MENU/SELECT twice on the originating handset to choose >Transfer. The originating handset displays Call transferred. The destination handset is automatically connected to the outside call.
 - To share the call, press MENU/select on your handset and then press
 ▼ or ▲ to highlight >Share call. Then press MENU/SELECT. Both handsets are connected to the outside call.
- To end the outside call, press OFF/cancel or place the handset in the telephone base or charger. The call continues until all handsets hang up.
- note
- You can cancel the intercom call before it is answered by pressing **OFF/cancel**.
- If the destination handset does not answer the intercom call within 100 seconds, or if it is accessing the answering system, is out of range, or has no power, the originating handset displays No answer. Try again and returns to idle mode.

Blind transfer

Use this feature to transfer an outside call to other system handsets without notifying them. This feature is available only if you have two or more handsets.

- 1. When the handset is on a call, press **MENU/SELECT**.
- 2. Press MENU/SELECT to choose >Transfer.
 - If you have two handsets, your handset displays Transferring call...
 - If you have three or more handsets, your handset displays TRANSFER TO:
 Use the dialing keys to enter a handset number (1-9 for handsets 1-9, ™ X
 and 0 for handset 10, ™ X and 1 for handset 11, ™ X and 2 for handset 12 or
 ™ X and # for all handsets), or press ▼ or ▲ to scroll to the desired handset
 then press MENU/SELECT. Your handset displays Transferring call... or
 Transferring call to all...

The destination handset rings and its screen displays **Transfer from other** handset or **Transfer from HANDSET X**.

- To end the outside call, press OFF/canceL or place the handset in the telephone base or charger.



- To cancel the blind transfer and return to the external call before it is answered, press off/CANCEL on your handset.
- If the destination handset does not answer the transferring call within 30 seconds, is accessing the answering system, is out of range, or has no power, your handset rings back and displays No response to transfer. If you do not press ALFLASH,
 SPEAKER or any dialing key (0-9, # or TOWN X) on your handset to reconnect the outside call within 30 seconds, the call hangs up automatically.

Push-to-talk (PTT)

You can directly broadcast messages from one handset to the speakerphone of one or multiple handsets. Press and hold PUSH TO TALK to begin two-way communication. If only one handset is available or registered, the handset screen shows

PTT requires two handsets when you press PUSH TO TALK.

- Only one handset can talk at a time. To do so, <u>press and hold</u>
 PUSH TO TALK while you are talking.
- You must release PUSH TO TALK, so the other person can respond.
- · Only one PTT session can be active at a time.
- While PTT is in use between two handsets, other handsets cannot use the intercom feature.
- If you attempt to place a PTT call to another handset that is on an outside call or intercom call, or accessing the answering system, your handset displays Not available at this time.

Turn PTT on or off

- Press PUSH TO TALK when the handset is not in use.
 The PUSH TO TALK menu displays.
- Press ▼ or ▲ to highlight >PTT On/Off, then press MENU/SELECT.
- Press ▼ or ▲ to choose >On or >Off, then press MENU/SELECT.





note

When PTT is turned off, the handset shows **No Incoming PTT** while the phone is not in use.

PTT to a single handset

- 1. You have two ways to begin a PTT call:
 - If you have two handsets, <u>press and hold</u> PUSH TO TALK when the handset is not in use.
 - If you have three or more handsets, press PUSH TO TALK when the handset is not in use. Then use the dialing keys to enter a handset number (1-9 for handsets 1-9, ™ X and 0 for handset 10, ™ X and 1 for handset 11, or ™ A and 2 for handset 12), or press ▼ or ▲ to scroll to the desired handset then press MENU/SELECT. Press MENU/SELECT or PUSH TO TALK to create the push-to-talk session.

Your handset displays **Connecting to HANDSET X...** for a few seconds. When the connection is made, both the originating and the destination handsets display **Press and hold [PTT] to talk** and beep once.

- Press and hold PUSH TO TALK on your handset. A chirp indicates your microphone is on. Speak towards the handset. Your voice is broadcast to the destination handset. While you are speaking, your handset displays PTT To handset X (X represents the destination handset).
- Release PUSH TO TALK after speaking. Both handsets beep once again.
 After the handsets beep, you can press and hold PUSH TO TALK to continue speaking or the destination handset can respond (see Answer a PTT call on page 30).
- Press OFF/canceL to end the PTT call. The handset displays Push to talk Ended for a few seconds.
 - -OR-

Place the handset in the telephone base or charger to end the PTT call.

note

After **PUSH TO TALK** is released, the PTT call remains open for a short time. If no one presses **PUSH TO TALK** within 10 seconds, the PTT call ends automatically.

PTT to multiple handsets

When there are multiple handsets registered to the telephone system, PTT supports one-to-group calls. PTT supports a maximum of one-to-four calls when one to five handsets are registered, and a maximum of one-to-three calls when six or more handsets are registered.

- 1. To begin a PTT call to multiple handsets:
 - Press and hold **PUSH TO TALK** when the handset is not in use.
 - If you have three or more handsets, press PUSH TO TALK when the handset is not in use. Press ™ ★ and #, or ▼ or ▲ to highlight >All handsets then press MENU/SELECT or PUSH TO TALK.

Your handset displays **Connecting to all handsets...** for a few seconds. When the connection is made, all handsets display **Press and hold [PTT] to talk** and beep once.

- Press and hold PUSH TO TALK on your handset. A chirp indicates your microphone is on. Speak towards the handset. Your voice is broadcast to all destination handsets.
 - While you are speaking, your handset displays **PTT To handset:** ☑ (**X** represents the destination handset).
- Release PUSH TO TALK after speaking. All eligible handsets beep once again. After the handsets beep, you can <u>press and hold</u> PUSH TO TALK to speak again or the destination handsets can respond (see Answer a PTT call on page 30).
- Press OFF/CANCEL to end the PTT call. The handset displays Push to talk Ended for a few seconds.
 - -OR-

Place the handset in the telephone base or charger to end the PTT call.

note

After **PUSH TO TALK** is released, the PTT call session remains open for a short time. If no one presses **PUSH TO TALK** within 10 seconds, the PTT call session ends automatically.

Answer a PTT call

You can respond to a PTT call whenever the speakerphone light is off, as described below.

- 1. When your handset receives a PTT call, the handset beeps and the screen displays **Press and hold [PTT] to talk**.
- 2. When the other party is speaking, your speakerphone light is on, and your handset displays PTT From HS X To HS ☑ (X represents the originating handset and Y represents the destination handset; a maximum of four handset numbers appear).
- When your speakerphone light is off and the screen displays Press and hold [PTT] to talk, press and hold PUSH TO TALK on your handset. You will hear a chirp. Speak towards the handset.
 - While you are speaking, your handset displays PTT To handset: X (X represents the handset numbers of one or more destination handsets; a maximum of four handset numbers appear).
 - Your voice is broadcast to all destination handsets.

After speaking, release **PUSH TO TALK**. Your handset will beep. After the beep, if your speakerphone light is off, you can <u>press and hold</u> **PUSH TO TALK** to speak again or the destination handset can respond.

Change a one-to-one PTT call to intercom call

You can convert a one-to-one PTT session to an intercom call.

- When your handset displays Press and hold [PTT] to talk, press MENU/SELECT. The screen displays >Intercom.
- 2. Press MENU/SELECT.
 - If you have two handsets, your handset displays Calling other handset.
 The destination handset temporarily displays Push to talk Ended and then Other handset is calling.
 - If you have three or more handsets, your handset displays Calling
 HANDSET Y (Y represents the destination handset). The destination
 handset temporarily displays Push to talk Ended and then HANDSET X is
 calling (X represents the originating handset).
- 4. To end the intercom call, press **OFF/cancel** or place the handset in the telephone base or charger. Both screens display **Intercom ended**.

End a PTT call

- For a one-to-one PTT call, both the originating and destination handsets can
 end the PTT call.
- For a PTT call to multiple handsets, the originating handset can end the PTT call. If any one of the destination handsets leaves the PTT call, the call continues until all handsets hang up.

To end or leave a PTT call:

 Press OFF/cancel or place the handset in the telephone base or charger. The handset displays Push to talk Ended.



After **PUSH TO TALK** is released, the PTT call remains open for a short time. If no one presses **PUSH TO TALK** within 10 seconds, the PTT call ends automatically.

Answer an incoming call during a PTT call

When you receive an incoming outside call during PTT, there is an alert tone.

- During a one-to-one PTT call, press TALM/FLASH on the originating or destination handset. The PTT call ends automatically and the outside call is answered.
- During a PTT call to multiple handsets, press TALFLASH on the originating handset. The PTT call ends automatically and the outside call is answered.
- During a PTT call to multiple handsets, press TALYFLASH on any one of the
 destination handsets and that handset answers the outside call. The PTT call
 continues for the rest of the PTT participants.
- To leave the PTT call without answering the incoming call, press OFF/cancel.
 The telephone continues to ring.

Make an outgoing call during a PTT call

- During a one-to-one PTT call, press TALL/FLASH to get a dial tone. The PTT call ends automatically.
- During a PTT call to multiple handsets, press p
- During a PTT call to multiple handsets, press TAT/FLASH on any one of the destination handsets and that handset gets a dial tone. The PTT call continues for the rest of the PTT participants.

Directory

About the directory

The directory can store up to 50 entries with up to 30 digits for each phone number and 15 alphanumeric characters for each name.

- Directory entries are shared by all system handsets. Any additions, deletions
 or edits made on one handset are reflected on all handsets.
- When you access the directory with no records, the screen displays Directory empty.
- When the directory is full and you try to save an entry, the screen displays Directory full.
- When you try to save a number already stored in the directory, the screen displays Number already saved.
- When reviewing a directory entry with a telephone number that exceeds 15 digits,
 * appears in front of the telephone number. Press ** to move towards the end of the telephone number or press # (pound key) to move towards the beginning of the telephone number.
- Only one handset can review the directory at a time. If a handset tries to enter the
 directory while another handset is already in it, Not available at this time appears.

Add a directory entry

Use the following steps to store an entry in the directory.

 Enter the number when the handset is not in use and press MENU/SELECT. The screen displays EDIT NUMBER.
 OR-

- a. Press MENU/select when the handset is not in use.
- b. Press ▼ or ▲ to highlight >Directory, then press MENU/SELECT.
- c. Press ▼ or ▲ to highlight >Add contact, then press MENU/SELECT. The screen displays ENTER NUMBER.
- 2. Use the dialing keys to enter or modify the number.
 - Press **MUTE/DELETE** to backspace and delete a digit.
 - Press and hold MUTE/DELETE to delete all digits.
 - Press ▼ or ▲ to move the cursor to the left or right.
 - Press and hold REDIAL/PAUSE to insert a dialing pause (a p appears).

-OR-

Copy a number from the redial list by pressing **REDIAL/PAUSE** and then press ▼ or **A**, or **REDIAL/PAUSE** repeatedly to choose a number. Press **MENU/SELECT** to copy the number.

- 3. Press MENU/SELECT to move to the name. The screen displays ENTER NAME.
- 4. Use the dialing keys to enter the name. Additional key presses show other characters of that particular key. Press the key repeatedly until the desired character appears. The first character and the character after a space are automatically capitalized.
 - Press 0 to add a space.
 - Press MUTE/DELETE to backspace and delete a character.
 - Press and hold MUTE/DELETE to delete all characters.
 - Press ▼ or ▲ to move the cursor to the left or right.
- Press MENU/SELECT to confirm. The screen displays Saved and you hear a confirmation tone.









Search the directory

Entries are sorted alphabetically.

1. Press MA when the handset is not in use.

-OR-

- Press MENU/select when the handset is not in use.
- b. Press ▼ or ▲ to highlight >Directory, then press MENU/SELECT.
- c. Press MENU/SELECT again to select >Review.
- Press ▼ or ▲ to browse.

>Directory Add contact Mike Smith 800-267-7377

Answering sys

Alphabetical search

Press MA when the handset is not in use.

-OR-

- a. Press MENU/select when the handset is not in use.
- b. Press ▼ or ▲ to highlight >Directory, then press MENU/SELECT.
- c. Press MENU/SELECT again to select >Review.
- 2. Use the dialing keys to enter the letters associated with the name. For example, if you have name entries Jenny, Jessie, Kristen and Laura in your directory, press 5 (JKL) once to see Jenny (when Jenny displays, press ▼ to see Jessie), twice to see Kristen, or three times to see Laura. If there is no name entry matching your search, the next closest match in alphabetical order appears. If necessary, press ▼ or ▲ to browse.

Dial a directory entry

- Search for the desired entry in the directory (see Search the directory or Alphabetical search above).
- 2. Press TALK/FLASH or SPEAKER to dial the displayed number.

-OR-

- 1. Press TALE/FLASH or)/SPEAKER.
- 2. Press MENU/select.
- 3. Press **▼** or **△** to highlight **>Directory**, then press **MENU/SELECT**.
- Press ▼ or ▲ or start an alphabetical search to browse to the desired entry, then press MENU/SELECT to dial the displayed number.

Edit a directory entry

- Search for the desired entry in the directory (see Search the directory or Alphabetical search on page 34).
- 2. Press MENU/SELECT. The screen displays EDIT NUMBER.
- 3. Use the dialing keys to edit the number.
 - Press mute/DELETE to backspace and delete a digit.
 - Press and hold MUTE/DELETE to delete all digits.
 - Press ▼ or ▲ to move the cursor to the left or right.
- 4. Press MENU/SELECT. The screen displays EDIT NAME.
- Use the dialing keys to edit the name. Additional key presses show other characters of that particular key. Press the key repeatedly until the desired character appears. The first character and the character after a space are automatically capitalized.
 - Press 0 to add a space.
 - Press MUTE/DELETE to backspace and delete a character.
 - $\bullet \quad \underline{\text{Press and hold}} \; \underline{\text{mute/DELETE}} \; \text{to delete all characters}.$
 - Press ▼ or ▲ to move the cursor to the left or right.
- Press MENU/SELECT to save the entry. The screen displays Saved and then the revised entry.

Delete a directory entry

- Search for the desired entry in the directory (see Search the directory or Alphabetical search on page 34).
- 2. Press MUTE/DELETE. The screen displays Delete contact?
- Press MENU/SELECT to confirm. The screen displays Contact deleted and you hear a confirmation tone.















Assign a directory entry to a speed dial location

You can store up to 10 directory entries in the speed dial directory. The speed dial entries are shared by all handsets.

- 1. Press and hold an empty speed dial key (0-9).
 - -OR-
 - a. Press MENU/select when the handset is not in use.
 - b. Press ▼ or ▲ to scroll to >Directory and then press MENU/SELECT.
 - c. Press ▼ or ▲ to scroll to >Speed dial, then press MENU/SELECT.
 - d. Press ▼ or ▲ to select an empty speed dial location.
- 2. Press MENU/SELECT. The screen displays Copy from Directory...
- 3. Press ▼ or ▲ to select a desired directory entry.
 - -OR-

Use the dialing keys to start an alphabetical search (see page 34).

4. Press MENU/SELECT to save. You hear a confirmation tone.











note

If the speed dial location is occupied, the new entry replaces the old one.

Dial a speed dial entry

<u>Press and hold</u> a speed dial key (0-9) of the desired entry when the handset is not in use. Then the number will be dialed automatically.

note

When the speed dial location chosen is empty, the handset will prompt you to the speed dial list. See **Assign a directory entry to a speed dial location** above to assign entries to the speed dial locations.

Reassign a speed dial number

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to scroll to >Directory and then press MENU/SELECT.
- Press ▼ or ▲ to scroll to >Speed dial, then press MENU/SELECT.
- Press ▼ or ▲ to select a desired speed dial location, then press MENU/SELECT.
- Press MENU/SELECT to choose >Change SD.
- Press MENU/SELECT and then the screen displays Copy from Directory...
- 7. Press ▼ or ▲ to select a desired directory entry.

-OR-

Use the dialing keys to start an alphabetical search (see page 34).

8. Press MENU/SELECT to save. You hear a confirmation tone.

Delete a speed dial entry

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to scroll to >Directory and then press MENU/SELECT.
- Press ▼ or ▲ to scroll to >Speed dial, then press MENU/SELECT.
- 4. Press ▼ or ▲ to select a desired speed dial location.
- 5. Press **MUTE/DELETE** to clear the speed dial location.

-OR-

Press MENU/SELECT twice. Press ▼ or ▲ to scroll to >Clear SD, then press MENU/SELECT. The screen displays Speed dial empty. You hear a confirmation tone.

















note

Clearing the speed dial locations does not affect the entries in the directory.

About caller ID

This product supports caller ID services provided by most telephone service providers. Depending on your service subscription, you may see the caller's number, or the caller's name and number that are sent by your telephone service provider after the first or second ring. Caller ID allows you to see the name, number, date and time of calls.

Information about caller ID with call waiting

Caller ID with call waiting lets you see the name and telephone number of the caller before answering the telephone, even while on another call.

It may be necessary to change your telephone service to use this feature. Contact your telephone service provider if:

- You have both caller ID and call waiting, but as separate services (you may need to combine these services).
- You have only caller ID service, or only call waiting service.
- · You do not subscribe to caller ID or call waiting services.

There may be fees for caller ID services. In addition, services may not be available in all areas.

This product can provide information only if both you and the caller are in areas offering caller ID service and if both telephone service providers use compatible equipment. The time and date are sent by your telephone service provider along with the call information.

You can use this product with regular caller ID service, or you can use this product's other features without subscribing to either caller ID or combined caller ID with call waiting service.

Caller ID log

If you subscribe to caller ID service, information about each caller will appear after the first or second ring. If you answer a call before the caller information appears on the screen, it will not be saved in the caller ID log.

- The caller ID log stores up to 50 entries. Each entry has up to 24 digits for the
 phone number and 15 characters for the name. If the phone number has more
 than 15 digits, only the last 15 digits appear. If the name has more than 15
 characters, only the first 15 characters are shown and saved in the caller ID log.
- You can review, redial and copy an entry into the directory.
- Entries appear in reverse chronological order.
- When the caller ID log is full, the oldest entry is deleted to make room for new incoming call information.
- XX Missed calls displays when there are new caller ID log entries that have not been reviewed.
- Caller ID log empty displays when you access the caller ID log with no records.
- Only one handset can review the caller ID log at a time. If a handset tries to
 enter the caller ID log while another handset is already in it, Not available at
 this time appears.



- The caller ID information may not be available for every incoming call. The callers may intentionally block their names and/or telephone numbers.
- For caller ID log entries with numbers between 16 and 24 digits, in order to view the entire number, you must save the entry to the directory (see page 41).
- If the phone number has more than 24 digits, it will not be saved or shown in the caller ID log.

Memory match

If the last seven digits of the incoming telephone number is an exact match with a telephone number in your directory, the name that appears on the screen matches the corresponding name in your directory.

For example, if Elizabeth Jones calls, her name appears as Liz if this is how you entered it into your directory.

note

The number you see on your caller ID is in the format sent by the telephone service provider. It usually delivers 10-digit telephone numbers (area code plus telephone number). If the last seven digits of the incoming telephone number does not match a number in your directory, the name appears as it is delivered by the telephone service provider.

Missed call indicator

When there are calls that have not been reviewed in the caller ID log, the handset displays **XX Missed calls**. When you have reviewed all the missed calls, the missed call indicator no longer displays.

Each time you review a caller ID log entry marked **NEW**, the number of missed calls decreases by one.

If you do not want to review the missed calls one by one, press and hold off/CANCEL when the handset is not in use to clear the missed call indicator. All the entries are then considered old and kept in the caller ID log.

HANDSET 1 5 Missed calls **A** 10/15 9:00m

Mike Smith 800-267-7377 NEW (1) 10/15 9:00m

Review the caller ID log

- 1. Press CID/▼ when the handset is not in use.
- Press ▼ or ▲ to browse.

-OR-

- 1. Press MENU/SELECT when the handset is not in use.
- Press ▼ or ▲ to scroll to >Caller ID log, then press MENU/SELECT.
- 3. Press MENU/SELECT to select >Review.
- 4. Press ▼ or ▲ to browse. You hear a double beep when you reach the beginning or end of the caller ID log.






View dialing options

Although the caller ID log entries received have 10 digits (the area code plus the seven-digit number), in some areas, you may need to dial only the seven digits, or 1 plus the seven digits, or 1 plus the area code plus the seven digits. You can change the number of digits that you dial from the caller ID log and store the new number to the directory.

While reviewing the caller ID log, press # (pound key) repeatedly to display different dialing options for local and long distance numbers before dialing or saving the telephone number in the directory.

Press 1 repeatedly if you need to add or remove 1 in front of the telephone number before dialing or saving it in the directory.



Dial a caller ID log entry

- 1. Search for the desired caller ID entry (see Review the caller ID log on page 40).
- 2. When the desired entry displays, press TALE/FLASH or ♥)/SPEAKER to dial.

Save a caller ID log entry to the directory

- 1. Search for the desired caller ID entry (see Review the caller ID log on page 40).
- Press MENU/SELECT to select an entry. The screen displays EDIT NUMBER.
- 3. Use the dialing keys to edit the number (up to 30 digits).
 - Press MUTE/DELETE to backspace and delete a digit.
 - Press and hold MUTE/DELETE to delete all digits.
 - Press ▼ or ▲ to move the cursor to the left or right.
 - Press and hold REDIAL/PAUSE to insert a dialing pause (a p appears).
- Press MENU/SELECT to move to the name. The screen displays EDIT NAME.
- 5. Use the dialing keys to edit the name (up to 15 characters).
 - Press 0 to add a space.
 - Press MUTE/DELETE to backspace and delete a character.
 - Press and hold MUTE/DELETE to delete all characters.
 - Press ▼ or ▲ to move the cursor to the left or right.
 - Press # (pound key) to switch the order of the names. For example, Miller Tom becomes Tom Miller when you press # (pound key).
- 6. Press MENU/SELECT to save the entry to the directory. The screen displays Saved and you hear a confirmation tone.
- note
- If the name received from your telephone service provider is all in capital letters, the first letter of every word remains a capital letter. However, the next letter after the prefix Mac, Mc, D' or O' is kept as a capital letter. For example, the D in MacDonald is kept as a capital letter. Another exception is that VAN DER will be changed to Van der.
- When you try to save a caller ID entry without any caller ID information, the handset displays Unable to save.









Delete the caller ID log entries

To delete one entry:

- 1. Search for the desired caller ID entry (see Review the caller ID log on page 40).
- 2. Press **MUTE/DELETE** to delete the selected entry.

To delete all entries:

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Caller ID log, then press MENU/SELECT.
- 3. Press ▼ or ▲ to highlight >Del all calls, then press MENU/SELECT. The screen displays Delete all calls? Press MENU/SELECT to confirm. You hear a confirmation tone and the screen returns to the previous menu.







Caller ID log display screen messages

Displays:	When:
PRIVATE NAME	The caller is blocking the name.
PRIVATE NUMBER	The caller is blocking the telephone number.
PRIVATE CALLER	The caller is blocking the name and number.
UNKNOWN NAME	This caller's name is unavailable.
UNKNOWN NUMBER	This caller's number is unavailable.
UNKNOWN CALLER	No information is available about this caller.

Answering system

Use the answering system menu of a system handset to turn on or off the answering system, set up the announcement message, activate the call screening, or change the number of rings, remote access code, message alert tone and message recording time. If your answering system is turned off and you change any of its settings, the answering system automatically turns on again.

You may also turn on or off the answering system at the telephone base.

Announcement

The telephone is preset with a greeting that answers calls with "Hello, please leave a message after the tone." You can use this preset announcement, or replace it with your own.

Record your own announcement

You can record an announcement up to 90 seconds, but announcements shorter than two seconds will not be recorded.

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- 3. Press MENU/SELECT to select >Announcement.
- Press ▼ or ▲ to highlight >Record annc, then press MENU/SELECT. The system announces, "Record after the tone. Press 5 when you are done," and the screen shows RECORDING ANNC... 5-Stop.



- 5. After the tone, speak towards the handset microphone.
- 6. Press **5** when done. The answering system automatically plays back the newly recorded announcement, then returns to the previous menu.

-OR-

Press off/CANCEL to exit without saving the recording.

Play your announcement

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- Press MENU/SELECT to select >Announcement.
- Press MENU/SELECT to select >Play annc. The handset plays the announcement and the screen shows PLAYING ANNC... 5-Stop.
- PLAYING ANNO...

 PLAYING ANNO...

 5-Stoe

 ()

 Press 5 to stop the playback and return to the previous menu, or the handset screen automatically returns to the previous menu after the playback. Press off/CANCEL to return to the previous menu during playback.

Delete your announcement

- 1. Press **MENU/select** when the handset is not in use.
- 2. Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- 3. Press MENU/SELECT to highlight >Announcement.
- 4. Press MENU/SELECT to select >Play annc.
- 5. When the handset is playing the announcement, press MUTE/DELETE. The handset displays Annc. Deleted and announces. "Announcement deleted."

when your announcement is deleted, calls are answered with the preset announcement.

Answer on/off

The answering system must be turned on to answer and record messages. When the answering system is turned on, the **ூ/ANS ON/OFF** light on the telephone base turns on and **ANS ON** displays on the handset.

To turn on or off with the telephone base:

Press **Ö/ANS ON/OFF** to turn the built-in answering system on or off. When the answering system is turned on, it announces, "Calls will be answered." When the answering system is turned off, it announces, "Calls will not be answered."



To turn on or off with a handset:

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- 3. Press ▼ or ▲ to highlight >Answer ON/OFF, then press MENU/SELECT.
- 4. Press **▼** or **△** to choose **>On** or **>Off**, then press **MENU/SELECT**.



- When you turn on the answering system at the telephone base with no memory capacity left, the telephone announces, "Memory is full. Calls will not be answered," and the answering system cannot be turned on. When you turn on the answering system with a handset, the handset displays Memory full.
- If the answering system has less than 3 minutes of recording time left, the telephone announces, "Less than 3 minutes to record," and the handset displays Less than 3 min to record.

Call screening

Use this feature to choose whether incoming messages can be heard when they are being recorded.

To turn on or off with a handset:

- 1. Press MENU/select when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Ans sys setup, then press MENU/SELECT.
- 4. Press MENU/SELECT to select >Call screening.
- 5. Press **▼** or **△** to choose **>On** or **>Off**, then press **MENU/SELECT** to save.





Number of rings

You can choose from two, three, four, five, six rings or toll saver. With toll saver selected, the answering system answers after two rings when you have new messages, and after four rings when you have no new messages. This enables you to check for new messages and avoid paying unnecessary long distance charges if you are calling from out of your local area.

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Ans sys setup, then press MENU/SELECT.
- Press ▼ or ▲ to highlight ># of rings, then press MENU/SELECT.
- Press ▼ or ▲ to choose 6, 5, 4, 3, 2 or Toll saver, then press MENU/SELECT to save.





note

If you set the number of rings that the answering system answers calls as 3 rings, the answering system may not have enough time to announce the caller's full information.

Remote access code

A two-digit security code is required to access the answering system remotely from any touch-tone telephone. The preset code is **19**. You can set the code from **00** to **99**.

- 1. Press MENU/select when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Ans sys setup, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Remote code, then press MENU/SELECT.
- 5. Use the dialing keys (0-9) to enter a two-digit number, then press MENU/SELECT to save.





Message alert tone

The telephone base beeps every 10 seconds to alert you of new messages. The tone stops when all new messages have been reviewed.

- Press MENU/select when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Ans sys setup, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Msg alert tone, then press MENU/SELECT.
- Press ▼ or ▲ to choose >On or >Off, then press MENU/SELECT to save.







- The answering system must be turned on for the message alert tone to function.
- Press any key on the telephone base (except **1/FIND HANDSET**) to temporarily silence the message alert tone.

Message recording time

You can set the recording time allowed for incoming messages. The message length is three minutes by default.

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering sys, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Ans sys setup, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Recording time, then press MENU/SELECT.
- 5. Press ▼ or ▲ to choose >3 minutes, >2 minutes, or >1 minute, then press MENU/SELECT to save.





Answering system and voicemail

Your telephone has separate indicators for two different types of voice messages: those left on its built-in answering system and those left at your service provider's voicemail. Your telephone's built-in answering system messages and voicemail messages are separate. Each alerts you to new messages differently.

- If oo and XX New messages display on the handset and the message window on the telephone base flashes, there are new messages in the built-in answering system. To listen to the messages recorded on your digital answering system, press ▶/■/PLAY/stop on the telephone base. To listen to messages with a handset, see To play messages with a handset on page 51.
- If and New voicemail display on the handset, your telephone service provider is indicating that it has new voicemail for you. To listen to your voicemail, you typically dial an access number provided by your telephone service provider, followed by a security code or PIN.

Some service providers bundle or combine multiple services like voicemail and call waiting, so you may not be aware that you have voicemail. To check what services you have and how to access them, contact your telephone service provider.

To use your voicemail service rather than your answering system, turn off your answering system. To use your answering system rather than your voicemail service, contact your telephone service provider to deactivate your voicemail service.

Using the answering system and voicemail together

You can also use your telephone answering system and voicemail together by setting your built-in answering system to answer before voicemail answers as described below. To learn how to program your voicemail settings, contact your telephone service provider. Then, if you are on a call, or if the answering system is busy recording a message and you receive another call, the second caller can leave a voicemail message.

Set your answering system to answer calls at least two rings earlier than your voicemail is set to answer. For example, if your voicemail answers after six rings, set your answering system to answer after four rings. Some voicemail providers may program the delay before answering calls in seconds instead of rings. In this case, allow six seconds per ring when determining the appropriate setting.

Message capacity

The answering system can record and store up to 99 messages. The recording time of each message depends on the message length you set (see **Message recording time** on page 47). The total storage capacity for the announcement, messages and memos is approximately 11 minutes. The actual recording time depends on individual message characteristics. Messages remain available for replay until you delete them.

New message indication

The message window on the telephone base flashes and **XX New messages** displays on the handset when there are new answering system messages. If the message alert tone is turned on, the telephone base beeps every 10

If the message alert tone is turned on, the telephone base beeps every 10 seconds when there are messages that have not been reviewed.

Call screening

Call screening at the telephone base:

If the answering system and call screening are on (see **Call screening** on page 45), the announcement and the incoming message broadcast at the telephone base while the call is answered by the answering system.

Options while a message is being recorded:

- Press ▲VOL or ▼VOL on the telephone base to adjust the call screening volume.
- Press ►/■/PLAY/STOP to temporarily silence the call screening.
- Press >/=/PLAY/stop or A/VOL to temporarily turn on the call screening if call screening is set to off.

Call screening at the handset:

If the answering system is on and your answering system is recording a message, your handset shows **To screen call**, **press [SELECT]**. Press **MENU/SELECT** to screen the call on your handset and the screen displays the caller ID information. If you do not subscribe to caller ID service, the handset shows **Screening...**



The call screening setting does not affect the call screening on the handset.

Call intercept

If you want to talk to the person whose message is being recorded, press TALASH OF SPEAKER on the handset.

Message playback

On the telephone base, if you have new messages, the telephone plays only the new messages (oldest first). If there are no new messages, the telephone plays all messages (oldest first).

On the handset, if you have both new and old messages, you can play either new or old messages. The caller ID information displays on the handset screen when you play messages and you can call back the caller.

When playback begins, you hear the total number of messages followed by the day and time of the message. If the time and date are not set, the telephone announces, "Time and date not set." After the last message, the telephone announces. "End of messages."

To play messages with the telephone base:

Press ►/■/PLAY/stop when the telephone is not in use.

Options during playback:

- Press ▲/VOL or ▼/VOL to adjust the speaker volume.
- Press ▶/SKIP to skip to the next message.
- Press
 /REPEAT once to repeat the message currently playing.
 Press
 /REPEAT twice to listen to the previous message.
- Press X/DELETE to delete the message currently playing. The system advances to the next message.
- Press ►/■/PLAY/STOP to stop. The telephone plays a long beep.

To play messages with a handset:


- Press MENU/select when the handset is not in use.
- Press MENU/SELECT to select >Play messages. If you have either new or old messages, the messages play automatically. If you have both new and old messages:
 - To play new messages, press MENU/SELECT to select >Play new msgs.
 - To play old messages, press ▼ or ▲ to highlight >Play old msgs, then press MENU/SELECT.

When the handset is playing a message, its screen shows the caller's name or number. If the caller's information is unavailable, the handset shows **No caller info**.

Options during playback:

- Press MENU/SELECT to pause the playback, and display the caller's information, then press TALL/FLASH or

 "SPEAKER to call back the caller. If you do not press TALL/FLASH within 10 seconds, message playback resumes automatically.
- Press ▼/VOLUME or ▲/VOLUME to adjust the speaker volume.
- Press † LEQ to adjust the handset message playback audio quality.
- · Press 6 to skip to the next message.
- Press 4 once to repeat the message currently playing. Press 4 twice to listen to the previous message.
- Press MUTE/DELETE to delete the message currently playing. The system announces, "Message deleted," and advances to the next message.
- Press 5 to stop.



 When the telephone is not in use, if F and the number of messages are flashing alternately in the message window, or the handset displays Rec mem full, the memory is full. Delete some messages to make room for more.









Delete all old messages

To delete all old messages with the telephone base:

- Press X/DELETE when the phone is not in use. The telephone announces, "To delete all old messages, press DELETE again."
- Press X/DELETE again. All previously heard messages are deleted and the telephone announces, "All old messages deleted."

To delete all old messages with a handset:

- 1. Press **MENU/select** when the handset is not in use.
- Press ▼ or ▲ to highlight >Answering Sys, then press MENU/SELECT.
- Press ▼ or ▲ to highlight >Delete all old, then press MENU/SELECT. The handset displays Delete all old messages? If there are no old messages in the answering system, the handset displays No old messages to delete.
- Press MENU/SELECT to save. The handset displays Deleting... and then All old msgs deleted! You hear a confirmation tone.







note

You can only delete old messages, which are messages you have played.

Record, play and delete memos

Memos are your own recorded messages used as reminders for yourself or others using the same answering system. You can record your own memos using a system handset. Play and delete them in the same way as incoming messages (see **Message playback** on pages 50-51).

To record a memo:

- Press MENU/select when the handset is not in use.
- 2. Press **▼** or **△** to highlight **>Answering Sys**, then press **MENU/SELECT**.
- 3. Press ▼ or ▲ to highlight >Record memo, then press MENU/SELECT.
- 4. The system announces, "Record after the tone. Press 5 when you are done." After the tone, speak towards the handset microphone.
- 5. Press 5 when you finish recording. The system announces, "Recorded."



- If you record a memo when the answering system memory is full, the system announces, "Memory is full."
- Each memo can be up to four minutes in length.
- Memos shorter than two seconds are not recorded.

Message window displays

Window display	Description
0	No message.
1-99	The total number of old messages recorded.
	The message number currently playing.
9-99 (flashing)	When time and date are not set, it flashes 0 , the total number of new messages recorded, or total number of old messages recorded.
	The telephone base may have lost and regained power.
	The clock needs to be set.
1-99 & F (alternating)	The answering system memory is full with total number of messages recorded.
1-8	The telephone base speaker volume level while adjusting.
0-6	The telephone base ringer level while adjusting.
	The system is answering a call, or recording a memo or announcement.
	The telephone is answering a call or being accessed remotely.
	The answering system is being programmed.

Remote access

A two-digit security code is required to access the answering system remotely from any touch-tone telephone. The preset code is **19**; see **Remote access code** on page 46 to change it.

- 1. Dial your telephone number from any touch-tone telephone.
- 2. When the system plays your announcement, enter the two-digit security code.
- 3. Then you can enter one of the following remote commands.

Command	Function
1	Play all messages.
2	Play new messages.
3	Delete the current message (during playback).
33	Delete all old messages.
4	Repeat the current message (during playback).
44	Listen to the previous message (during playback).
5	Stop.
*5	Hear a list of remote commands.
6	Skip to the next message (during playback).
*7	Record a new announcement.
8	End the call.
0	Turn the answering system on or off.

4. Hang up or press 8 to end the call.



- If you do not press any keys after you enter the remote access code, all new messages play. If there are no new messages, all old messages play.
- Once the new messages have played, the telephone announces the help menu options. If you do not press any key within 20 seconds, the remote access call automatically disconnects.
- When the answering system is turned off, the telephone answers after 10 rings, and announces, "Please enter your remote access code."
- When the answering system memory is full, the telephone announces, "Memory is full. Enter the remote access code."

Handset display screen messages

Answerin9 sys is ON	The answering system is automatically turned on when you change the settings under answering system setup menu.
Caller ID log empty	There are no caller ID log entries.
Calling HANDSET X (for models with three or more handsets) Calling other handset. (for models with two handsets)	Calling another handset (intercom).
Directory empty	There are no directory entries.
Directory full	The directory is full.
Ended	You have just ended a call.
HANDSET X is calling (for models with three or more handsets) Other handset is calling (for models with two handsets)	Another system handset is calling (intercom).
Incomin9 call	There is an incoming call.
Intercom	The handset is on an intercom call.
Intercom ended	You have just ended an intercom call.
Line in use	A system handset or another telephone on the same line is in use, or the answering system is answering a call.
Low battery	The handset battery needs to be recharged.
Microphone ON	MUTE is turned off and the person on the other end can hear you.
Muted	You have turned off the handset microphone. The other party cannot hear you but you can hear the other party.
New voicemail	There are new voicemail messages from your telephone service provider.
No answer. Try again	You have attempted to make an intercom call, but the handset you are calling is in the directory, in the caller ID log or out of range, or the handset you are calling is accessing the answering system or on an outside call.

Handset display screen messages

No battery	No battery is installed. Follow the directions for battery installation on page 3 to install the battery before charging.
No line	There is no telephone line connected.
No si9nal; call ended	Communication between the handset and telephone base is lost during a call.
Not available at this time	One handset is already viewing the caller ID log or directory, and another handset attempts to review it.
	You attempt to place a PTT call to another handset which is on an outside call or intercom call, or accessing the answering system.
Number already saved	The telephone number entered is already stored in the directory.
Out of range OR No ewr at base	The handset cannot communicate with the telephone base. Check the telephone base power connection or move closer.
** Paging **	The system handset is being paged.
Phone	The handset is on a call.
Place in charger	The battery is very low. Place the handset in the telephone base or charger for recharging.
Rec mem full	The answering system memory is full.
Rec mem low	The answering system has less than three minutes of recording time left.
Ringer muted	The ringer is muted temporarily during an incoming or intercom call.
Ringer off	The ringer is turned off.
Saved	Your selection has been saved.
Seaker	The handset speakerphone is in use.
Unable to call. Line in use	You try to predial a number while the telephone line is in use.
Unable to call. Try again	You try to join a call when there are already four handsets on that call, or to make an outside call when another handset is transferring a call with the intercom feature.
Unable to save	You try to save a caller ID entry without a number into the directory.
XX Missed calls	There are XX calls that have not been reviewed in your caller ID log.
XX New messages	There are XX new messages in the answering system.

Handset and telephone base indicators

Handset lights

◄ 》	On when the handset speakerphone is in use.
CHARGE	On when the handset is charging in the telephone base or charger.

Telephone base lights

IN USE	On when the telephone line is in use.
	On when the answering system is answering a call.
	On when you are registering a handset.
	Flashes quickly when there is an incoming call.
	Flashes when another telephone sharing the same line is in use.
	Flashes when you are deregistering all handsets.
ტ/ANS ON/OFF	On when the answering system is turned on.

Handset icons

O	The battery icon flashes when the battery is low and needs charging.
	The battery icon animates when the battery is charging.
	The battery icon becomes solid when the battery is fully charged.
■ 》	The speakerphone is in use.
ダ	The handset ringer is off.
₩	There are new voicemail received from your telephone service provider.
ANS ON	The answering system is turned on.
ထ	There are new answering system messages.
NEW	There are new caller ID log entries.
MUTE	The microphone is muted.
MSG #	The message number currently playing and total number of messages recorded.

Expand your telephone system

You can add new handsets (**LS6405**, purchased separately) to your telephone base. Your telephone base supports a maximum of 12 handsets.

For more details, refer to the user's manual that comes with your **LS6405** new handset.

Troubleshooting

If you have difficulty with your telephone, please try the suggestions below. For customer service, visit our website at www.vtechcanada.com or call 1 (800) 267-7377.

My telephone does not work at all.

- Make sure the battery is installed and charged correctly (pages 3-4). For optimum daily performance, return the handset to the telephone base or charger after use.
- Make sure the power adapter is securely plugged into an outlet not controlled by a wall switch.
- Make sure the telephone line cord is plugged firmly into the telephone base and the telephone wall jack.
- Unplug the electrical power to the telephone base. Wait for approximately 15 seconds, then plug it back in. Allow up to one minute for the cordless handset and telephone base to synchronize.
- Charge the battery in the handset for up to 10 hours.
- If the battery is completely depleted, charge the handset for at least 30 minutes before using it (page 4).
- Remove and then install the battery again. If that still does not work, it may be necessary to purchase a new battery.
- Other electronic products such as HAM radios and other DECT phones can cause interference with your cordless phone. Try installing your phone as far away as possible from these types of electronic devices.
- Disconnect the telephone base from the telephone wall jack and plug in a working telephone. If the other telephone does not work, the problem is probably in the wiring or telephone service. Contact your telephone service provider.

The display shows No line. I cannot get a dial tone.

- Try all the above suggestions.
- Make sure the telephone line cord is plugged firmly into the telephone base and the telephone wall jack.
- Disconnect the telephone line cord from your telephone and connect it to another telephone. If there is no dial tone on that other telephone either, then the telephone line cord may be defective. Try installing a new telephone line cord.
 If changing the telephone line cord does not help, the wall jack (or the wiring to this wall jack) may be defective. Contact your telephone service provider.

The display shows Put HS on BASE to register. The handset does not work at all.

 The handset is deregistered from the telephone base. Place the handset in the telephone base to register it back. The handset shows HANDSET X Registered (X represents the registered handset number) and beeps when the registration process completes. This process takes about 90 seconds to complete.

Troubleshooting

I cannot dial out from my cordless handset.

- Try all the above suggestions.
- Make sure there is a dial tone before dialing. It is normal if the handset takes a second
 or two to synchronize with the telephone before producing a dial tone. Wait an extra
 second before dialing.
- If other telephones in your home are having the same problem, the problem is in the wiring or telephone service. Contact your telephone service provider.
- Eliminate any background noise. Mute the cordless handset before dialing, or dial from another room in your home with less background noise.

Low battery shows on screen.

- Place the handset in the telephone base or charger for recharging.
- Remove and then install the battery again and use it until fully depleted. Then recharge
 the handset in the telephone base or charger for up to 10 hours.
- If the above measures do not correct the problem, replace the battery.

The battery does not charge in the handset or the handset battery does not accept charge.

- Make sure the handset is placed in the telephone base or charger correctly. The CHARGE light on the handset should be on.
- Remove and then install the battery again, then charge for up to 10 hours.
- If the handset is in the telephone base or charger but the CHARGE light on the handset is not on, refer to The CHARGE light is off below.
- If the battery is completely depleted, charge the handset for at least 30 minutes before using it (page 4).
- Purchase a new battery. Refer to Battery installation (page 3) and Battery charging (page 4).

The CHARGE light is off.

- Clean the charging contacts on the handset and telephone base each month with a pencil eraser or a dry non-abrasive fabric.
- Make sure the power adapter and telephone line cord are plugged in correctly and securely.
- Unplug the power adapter. Wait for 15 seconds before plugging it back in. Allow up to one minute for the handset and telephone base to reset.

The telephone does not ring when there is an incoming call.

- Make sure the handset ringer volume is not set to the lowest level (page 12) and the telephone base ringer volume is not set to zero (page 12).
- Make sure the telephone line cord and power adapter are plugged in properly (page 2).
- The handset may be too far from the telephone base. Move it closer to the telephone base.
- There may be too many extension phones on the telephone line to allow all of them to ring simultaneously. Unplug some of them.

Troubleshooting

- If other telephones in your home are having the same problem, the problem is in the wiring or telephone service. Contact your telephone service provider.
- Other electronic products such as HAM radios and other DECT phones can cause interference with your cordless phone. Try installing your phone as far away as possible from these types of electronic devices.
- Test a working telephone at the telephone wall jack. If another telephone has the same problem, the problem is in the telephone wall jack. Contact your telephone service provider.
- The telephone line cord may be defective. Install a new telephone line cord.
- Remove and then install the battery again and place the handset in the telephone base or charger.
- Wait for the handset to synchronize with the telephone base. Allow up to one minute for this to take place.

My handset beeps and is not performing normally.

- Make sure the power cord is securely plugged into the telephone base. Plug the telephone base into a different working electrical outlet not controlled by a wall switch.
- Move the handset closer to the telephone base. It may be out of range.
- Reset the telephone base by unplugging the electrical power to the base. Wait for 15 seconds and plug it back in again. Allow up to one minute for the cordless handset and the telephone base to synchronize.
- Other electronic products such as HAM radios and other DECT phones can cause interference with your cordless phone. Try installing your phone as far away as possible from these types of electronic devices.

I hear noise on the cordless handset and the keys do not work.

Make sure the telephone line cord is plugged in securely.

There is interference during a telephone conversation. My calls fade out when I am using the cordless handset.

- The handset may be out of range. Move it closer to the telephone base.
- If you subscribe to high-speed Internet service (digital subscriber line DSL) through
 your telephone line, you must install a DSL filter between the telephone line cord and
 the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL
 interference. Contact your DSL service provider for more information about DSL filters.
- Appliances or other cordless telephones plugged into the same circuit as the telephone base can cause interference. Try moving the appliance or telephone base to another outlet.
- Other electronic products such as HAM radios and other DECT phones can cause interference with your cordless phone. Try installing your phone as far away as possible from these types of electronic devices.

Troubleshooting

- If your telephone is plugged in with a modem or a surge protector, plug the telephone (or modem/surge protector) into a different location. If this doesn't solve the problem, relocate your telephone or modem farther apart from each other, or use a different surge protector.
- The location of your telephone base can impact the performance of your cordless
 phone. For better reception, install the telephone base in a centralized location within
 your home or office, away from walls or other obstructions. In many environments,
 elevating the telephone base improves overall performance.
- Disconnect the telephone base from the telephone wall jack and plug in a corded telephone. If calls are still not clear, the problem is probably in the wiring or telephone service. Contact your telephone service provider (charges may apply).
- If other telephones in your home are having the same problem, the problem is in the wiring or telephone service. Contact your telephone service provider.

I hear other calls when using the cordless handset.

 Disconnect the telephone base from the telephone wall jack. Plug in a different telephone. If you still hear other calls, the problem is probably in the wiring or telephone service. Call your telephone service provider.

The other party cannot hear my voice during a call.

Make sure the mute feature is not turned on during a call (page 20).

My caller ID features are not working properly.

- Caller ID is a subscription service. You must subscribe to this service from your telephone service provider for this feature to work on your telephone.
- The caller may not be calling from an area which supports caller ID.
- Both your and your caller's telephone service providers must use equipment compatible
 with the caller ID service.
- The caller ID information shows after the first or second ring.
- If you subscribe to high-speed Internet service (digital subscriber line DSL) through
 your telephone line, you must install a DSL filter between the telephone line cord and
 the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL
 interference. Contact your DSL service provider for more information about DSL filters.

Troubleshooting

The telephone does not receive caller ID or the telephone does not show caller ID during call waiting.

- Make sure you subscribe to caller ID with call waiting features provided by your telephone service provider.
- The caller may not be calling from an area which supports caller ID.
- Both your and your caller's telephone service providers must use equipment compatible with caller ID service.
- If you subscribe to high-speed Internet service (digital subscriber line DSL) through
 your telephone line, you must install a DSL filter between the telephone line cord and
 the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL
 interference. Contact your DSL service provider for more information about DSL filters.

Caller ID entries do not match the numbers I need to dial.

- Caller ID service delivers 10 digits (the area code plus the seven-digit number). If you need to dial something other 10 digits, see View dialing options on page 40 for instructions on changing the number.
- If you dial seven digits for local calls, you may want to use the home area code feature (page 17).

Out of range OR No pwr at base shows in the handset screen.

- The handset may be out of range. Move it closer to the telephone base.
- Make sure the power cord is securely plugged into the telephone base. Use a working electrical outlet not controlled by a wall switch.
- Reset your telephone by unplugging the power adapter from the telephone base.
 Disconnect the battery from the cordless handset. Wait for 15 seconds, then plug in the power adapter and install the battery again. Place the handset in the telephone base and allow up to one minute for the handset and telephone base to synchronize.
- Other electronic products such as HAM radios and other DECT phones can cause interference with your cordless phone. Try installing your phone as far away as possible from these types of electronic devices.

New voicemail and show on the display and I don't know why.

 Your telephone has voicemail indication that is separate from the built-in answering system. If New voicemail and peer on the display, then your telephone has received a signal from your telephone service provider that you have a voicemail message waiting for you to retrieve from your telephone service provider. Contact your telephone service provider for more information on how to access your voicemail.

Troubleshooting

I cannot retrieve voicemail messages.

Your telephone has both a built-in answering system and voicemail indication. They
are independent features and each alerts you to new messages differently (page 48). If
you subscribe to voicemail service from your telephone service provider (charges may
apply), contact your telephone service provider for more information on how to access
your voicemail.

The answering system does not answer after the correct number of rings.

- Make sure the answering system is on. When the answering system is on, the **\One{\One}/ANS ON/OFF** light on the telephone base should be lit and **ANS ON** should show on the handset.
- If toll saver is selected, the number of rings changes to two when there are new messages waiting (page 46).
- If the memory is full or if the answering system is off, the answering system answers after 10 rings.
- In some cases, the answering system is affected by the ringing system used by your telephone service provider.
- If you subscribe to voicemail service, change the number of rings so that your answering system answers before your voicemail answers (page 46). To determine how many rings activate your voicemail, contact your telephone service provider.
- If there is a fax machine connected to the same telephone line, try disconnecting the fax machine. If that solves the problem, consult your fax machine documentation for information on compatibility with answering systems.

The outgoing announcement is not clear.

- When recording the announcement, make sure you speak in a normal tone of voice towards the microphone of the handset.
- · Make sure there is no background noise when recording.

The answering system does not record messages.

- Make sure the answering system is on (page 45).
- When the answering machine memory is full, it does not record new messages until some old messages are deleted.
- If you subscribe to voicemail service, change the number of rings so that your answering system answers before your voicemail answers (page 46). To determine how many rings activate your voicemail, contact your telephone service provider.
- If there is a fax machine connected to the same telephone line, try disconnecting the
 fax machine. If that solves the problem, consult your fax machine documentation for
 information on compatibility with answering systems.

The messages on the answering system are very difficult to hear.

 Press AVOL on the telephone base or AVOLUME on the handset to increase the speaker volume.

Troubleshooting

The messages on the answering system are incomplete.

- The recording time of each message depends on the message recording time you set (page 47).
- If a caller leaves a very long message, part of it may be lost when the answering system disconnects the call after the preset message recording time.
- If the memory on the answering system becomes full during a message, the answering system stops recording and disconnects the call.
- If the caller's voice is very soft, the answering system may stop recording and disconnect the call.

The answering system does not respond to remote commands.

- Make sure your remote access code is correct (page 46).
- Make sure you are calling from a touch-tone telephone. When dialing a number, there
 should be tones. If there are clicks, then it is not a touch-tone telephone and cannot
 activate the answering system.
- The answering system may not detect the remote access code when your announcement is playing. Wait until the announcement is over before entering the code.
- There may be interference on the telephone line you are using. Press the dialing keys firmly when dialing.

I subscribe to a nontraditional telephone service that uses my computer to establish connections, and my telephone doesn't work.

- · Make sure your computer is powered on.
- · Make sure your Internet connection is working properly.
- Make sure that the software is installed and running for your nontraditional telephone service.
- Make sure to plug your USB telephone adapter into a dedicated USB port on your computer. Do not plug into a multiple port USB hub (USB splitter) that is not powered.
- In a few rare instances, the USB port on your computer may not have enough power.
 In these instances, try using a USB hub with its own external power supply.
- If you are using a firewall, it may prevent access to your nontraditional telephone service. Contact your service provider for more information.

Common cure for electronic equipment.

- If the telephone is not responding normally, put the cordless handset in the telephone base. If it does not fix the problem, try the following (in the order listed):
 - 1. Disconnect the power to the telephone base.
 - 2. Disconnect the battery on the cordless handset.
 - 3. Wait a few minutes before connecting power to the telephone base.
 - 4. Remove and then install the battery again and place the cordless handset in the telephone base or charger.
 - 5. Wait for the cordless handset to synchronize with the telephone base. Allow up to one minute for this to take place.

Important safety instructions

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- 1. Read and understand all instructions.
- 2. Follow all warnings and instructions marked on the product.
- Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- Do not use this product near water such as near a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
- 5. Do not place this product on an unstable table, shelf, stand or other unstable surfaces.
- Avoid placing the telephone system in places with extreme temperature, direct sunlight, or other electrical devices. Protect your phone from moisture, dust, corrosive liquids and fumes.
- 7. Slots and openings in the back or bottom of the telephone base and handset are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a radiator or heat register. This product should not be placed in any area where proper ventilation is not provided.
- This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home or office, consult your dealer or local power company.
- Do not allow anything to rest on the power cord. Do not install this product where the cord may be walked on.
- 10. Never push objects of any kind into this product through the slots in the telephone base or handset because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the product.
- 11. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorized service facility. Opening or removing parts of the telephone base or handset other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
- 12. Do not overload wall outlets and extension cords.
- 13. Unplug this product from the wall outlet and refer servicing to an authorized service facility under the following conditions:
 - When the power supply cord or plug is damaged or frayed.
 - · If liquid has been spilled onto the product.
 - If the product has been exposed to rain or water.
 - If the product does not operate normally by following the operating instructions. Adjust only those
 controls that are covered by the operation instructions. Improper adjustment of other controls may
 result in damage and often requires extensive work by an authorized technician to restore the
 product to normal operation.
 - If the product has been dropped and the telephone base and/or handset has been damaged.
 - If the product exhibits a distinct change in performance.
- 14. Avoid using a telephone (other than cordless) during an electrical storm. There is a remote risk of electric shock from lightning.
- 15. Do not use the telephone to report a gas leak in the vicinity of the leak. Under certain circumstances, a spark may be created when the adapter is plugged into the power outlet, or when the handset is replaced in its cradle. This is a common event associated with the closing of any electrical circuit. The user should not plug the phone into a power outlet, and should not put a charged handset into the cradle, if the phone is located in an environment containing concentrations of flammable or flame-supporting gases, unless there is adequate ventilation. A spark in such an environment could create a fire or explosion. Such environments might include: medical use of oxygen without adequate ventilation; industrial gases (cleaning solvents; gasoline vapors; etc.); a leak of natural gas; etc.
- 16. Only put the handset of your telephone next to your ear when it is in normal talk mode.

Important safety instructions

17. The power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.

SAVE THESE INSTRUCTIONS

Battery

- · CAUTION: Use Only Supplied Battery.
- Do not dispose of the battery in a fire. Check with local waste management codes for special disposal instructions.
- Do not open or mutilate the battery. Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte may be toxic if swallowed.
- Exercise care in handling batteries in order not to create a short circuit with conductive materials.
- Charge the battery provided with or identified for use with this product only in accordance with the instructions and limitations specified in this manual.

Precautions for users of implanted cardiac pacemakers

Cardiac pacemakers (applies only to digital cordless telephones):

Wireless Technology Research, LLC (WTR), an independent research entity, led a multidisciplinary evaluation of the interference between portable wireless telephones and implanted cardiac pacemakers. Supported by the U.S. Food and Drug Administration, WTR recommends to physicians that:

Pacemaker patients

- Should keep wireless telephones at least six inches from the pacemaker.
- Should NOT place wireless telephones directly over the pacemaker, such as in a breast pocket, when it is turned ON.
- Should use the wireless telephone at the ear opposite the pacemaker.

WTR's evaluation did not identify any risk to bystanders with pacemakers from other persons using wireless telephones.

About cordless telephones

- Privacy: The same features that make a cordless telephone convenient create some limitations.
 Telephone calls are transmitted between the telephone base and the cordless handset by radio
 waves, so there is a possibility that the cordless telephone conversations could be intercepted by
 radio receiving equipment within range of the cordless handset. For this reason, you should not think
 of cordless telephone conversations as being as private as those on corded telephones.
- Electrical power: The telephone base of this cordless telephone must be connected to a working
 electrical outlet. The electrical outlet should not be controlled by a wall switch. Calls cannot be made
 from the cordless handset if the telephone base is unplugged, switched off or if the electrical power
 is interrupted.
- Potential TV interference: Some cordless telephones operate at frequencies that may cause
 interference to televisions and VCRs. To minimize or prevent such interference, do not place
 the telephone base of the cordless telephone near or on top of a TV or VCR. If interference is
 experienced, moving the cordless telephone farther away from the TV or VCR often reduces or
 eliminates the interference.
- Rechargeable batteries: Exercise care in handling batteries in order not to create a short circuit
 with conducting material such as rings, bracelets and keys. The battery or conductor may overheat
 and cause harm. Observe proper polarity between the battery and the battery charger.
- Nickel-metal hydride rechargeable batteries: Dispose of these batteries in a safe manner. Do
 not burn or puncture the battery. Like other batteries of this type, if burned or punctured, they could
 release caustic material which could cause injury.

Operating range

This cordless telephone operates with the maximum power allowed by the Federal Communications Commission (FCC). Even so, this handset and telephone base can communicate over only a certain distance - which can vary with the locations of the telephone base and handset, the weather, and the layout of your home or office.

When the handset is out of range, the handset displays Out of range OR No pwr at base.

If there is a call while the handset is out of range, it may not ring, or if it does ring, the call may not connect well when you press TATA/FLASH. Move closer to the telephone base, then press TATA/FLASH to answer the call.

If the handset moves out of range during a telephone conversation, there may be interference. To improve reception, move closer to the telephone base.

Maintenance

Taking care of your telephone

Your cordless telephone contains sophisticated electronic parts, so it must be treated with care.

Avoid rough treatment

Place the handset down gently. Save the original packing materials to protect your telephone if you ever need to ship it.

Avoid water

Your telephone can be damaged if it gets wet. Do not use the handset outdoors in the rain, or handle it with wet hands. Do not install the telephone base near a sink, bathtub or shower.

Electrical storms

Electrical storms can sometimes cause power surges harmful to electronic equipment. For your own safety, take caution when using electrical appliances during storms.

Cleaning your telephone

Your telephone has a durable plastic casing that should retain its luster for many years. Clean it only with a soft cloth slightly dampened with water or mild soap. Do not use excess water or cleaning solvents of any kind.

Remember that electrical appliances can cause serious injury if used when you are wet or standing in the water. If the telephone base should fall into the water, DO NOT RETRIEVE IT UNTIL YOU UNPLUG THE POWER CORD AND TELEPHONE LINE CORD FROM THE WALL. Then remove the telephone by the unplugged cords.

The RBRC® seal

The RBRC® seal on the nickel-metal hydride battery indicates that VTech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The RBRC® program provides a convenient alternative to placing used nickel-metal hydride batteries into the trash or municipal waste, which may be illegal in your area.

VTech's participation in RBRC® makes it easy for you to drop off the spent battery at local retailers participating in the RBRC® program or at authorized VTech product service centers. Please call 1 (800) 8 BATTERY® for information on Ni-MH battery recycling and disposal bans/restrictions in your area. VTech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

RBRC® and 1 (800) 8 BATTERY® are registered trademarks of Rechargeable Battery Recycling Corporation.



FCC, ACTA and IC regulations

FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- · Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this telephone.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The handset may be safely held against the ear of the user. The telephone base shall be installed and used such that parts of the user's body other than the hands are maintained at a distance of approximately 20 cm (8 inches) or more.

This Class B digital apparatus complies with Canadian requirement: CAN ICES-3 (B)/NMB-3(B).

FCC Part 68 and ACTA

This equipment complies with Part 68 of the FCC rules and with technical requirements adopted by the Administrative Council for Terminal Attachments (ACTA). The label on the back or bottom of this equipment contains, among other things, a product identifier in the format US:AAAEQ##TXXXX. This identifier must be provided to your telephone service provider upon request.

The plug and jack used to connect this equipment to premises wiring and the telephone network must comply with applicable Part 68 rules and technical requirements adopted by ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. An RJ11 jack should normally be used for connecting to a single line and an RJ14 jack for two lines. See the installation instructions in the user's manual.

The Ringer Equivalence Number (REN) is used to determine how many devices you may connect to your telephone line and still have them ring when you are called. The REN for this product is encoded as the 6th and 7th characters following the US: in the product identifier (e.g., if ## is 03, the REN is 0.3). In most, but not all areas, the sum of all RENs should be five (5.0) or less. For more information, contact your telephone service provider.

This equipment may not be used with Party Lines. If you have specially wired alarm dialing equipment connected to your telephone line, ensure the connection of this equipment does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone service provider or a qualified installer.

FCC, ACTA and IC regulations

If this equipment is malfunctioning, it must be unplugged from the modular jack until the problem has been corrected. Repairs to this telephone equipment can only be made by the manufacturer or its authorized agents. For repair procedures, follow the instructions outlined under the Limited warranty.

If this equipment is causing harm to the telephone network, the telephone service provider may temporarily discontinue your telephone service. The telephone service provider is required to notify you before interrupting service. If advance notice is not practical, you will be notified as soon as possible. You will be given the opportunity to correct the problem and the telephone service provider is required to inform you of your right to file a complaint with the FCC. Your telephone service provider may make changes in its facilities, equipment, operation, or procedures that could affect the proper functioning of this product. The telephone service provider is required to notify you if such changes are planned.

If this product is equipped with a corded or cordless handset, it is hearing aid compatible.

If this product has memory dialing locations, you may choose to store emergency telephone numbers (e.g., police, fire, medical) in these locations. If you do store or test emergency numbers, please:

Remain on the line and briefly explain the reason for the call before hanging up.

Perform such activities in off-peak hours, such as early morning or late evening.

Industry Canada

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Privacy of communications may not be ensured when using this phone.

The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met.

The Ringer Equivalence Number (REN) for this terminal equipment is 0.1. The REN is an indication of the maximum number of devices allowed to be connected to a telephone interface. The termination on an interface may consist of any combination of devices subject only to the requirement that the sum of the RENs of all the devices does not exceed five.

This product meets the applicable Industry Canada technical specifications.

Limited warranty

What does this limited warranty cover?

The manufacturer of this VTech Product warrants to the holder of a valid proof of purchase ("Consumer" or "you") that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the United States of America and Canada.

What will VTech do if the Product is not free from defects in materials and workmanship during the limited warranty period ("Materially Defective Product")?

During the limited warranty period, VTech's authorized service representative will repair or replace at VTech's option, without charge, a Materially Defective Product. If we repair the Product, we may use new or refurbished replacement parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Repair or replacement of the Product, at VTech's option, is your exclusive remedy. VTech will return the repaired or replacement Products to you in working condition. You should expect the repair or replacement to take approximately 30 days.

How long is the limited warranty period?

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase. If VTech repairs or replaces a Materially Defective Product under the terms of this limited warranty, this limited warranty also applies to repaired or replacement Product for a period of either (a) 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original one-year warranty; whichever is longer.

What is not covered by this limited warranty?

This limited warranty does not cover:

- Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, water or other liquid intrusion; or
- Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of VTech; or
- Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
- 4. Product to the extent that the problem is caused by use with non-VTech accessories; or
- 5. Product whose warranty/quality stickers, product serial number plates or electronic serial numbers have been removed, altered or rendered illegible; or
- Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
- 7. Product returned without a valid proof of purchase (see item 2 below); or
- Charges for installation or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

Limited warranty

How do you get warranty service?

To obtain warranty service, please visit our website at www.vtechcanada.com or call 1 (800) 267-7377.

NOTE: Before calling for service, please review the user's manual - a check of the Product's controls and features may save you a service call.

Except as provided by applicable law, you assume the risk of loss or damage during transit and transportation and are responsible for delivery or handling charges incurred in the transport of the Product(s) to the service location. VTech will return repaired or replaced Product under this limited warranty. Transportation, delivery or handling charges are prepaid. VTech assumes no risk for damage or loss of the Product in transit. If the Product failure is not covered by this limited warranty, or proof of purchase does not meet the terms of this limited warranty, VTech will notify you and will request that you authorize the cost of repair prior to any further repair activity. You must pay for the cost of repair and return shipping costs for the repair of Products that are not covered by this limited warranty.

What must you return with the Product to get warranty service?

- Return the entire original package and contents including the Product to the VTech service location along with a description of the malfunction or difficulty; and
- Include a "valid proof of purchase" (sales receipt) identifying the Product purchased (Product model) and the date of purchase or receipt; and
- 3. Provide your name, complete and correct mailing address, and telephone number.

Other limitations

This warranty is the complete and exclusive agreement between you and VTech. It supersedes all other written or oral communications related to this Product. VTech provides no other warranties for this Product. The warranty exclusively describes all of VTech's responsibilities regarding the Product. There are no other express warranties. No one is authorized to make modifications to this limited warranty and you should not rely on any such modification.

State/Provincial Law Rights: This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state or province to province.

Limitations: Implied warranties, including those of fitness for a particular purpose and merchantability (an unwritten warranty that the Product is fit for ordinary use) are limited to one year from the date of purchase. Some states/provinces do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In no event shall VTech be liable for any indirect, special, incidental, consequential, or similar damages (including, but not limited to lost profits or revenue, inability to use the Product or other associated equipment, the cost of substitute equipment, and claims by third parties) resulting from the use of this Product. Some states/provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Please retain your original sales receipt as proof of purchase.

Technical specifications

Frequency Control	Crystal controlled PLL synthesizer
Transmit frequency	Handset: 1921.536-1928.448 MHz Telephone base: 1921.536-1928.448 MHz
Channels	5
Nominal effective range	Maximum power allowed by FCC and IC. Actual operating range may vary according to environmental conditions at the time of use.
Power requirements	Handset: 2.4V Ni-MH battery Telephone base: 6V DC @ 400mA Charger: 6V AC @ 300mA
Memory	Handset directory: 50 memory locations; up to 30 digits and 15 characters Handset caller ID log: 50 memory locations; up to 24 digits and 15 characters

Index

About cordless telephones 70 Add a directory entry 33 Alphabetical search 34 Announced transfer 25 Announcement 43 Answer a call 19 Answer an incoming call during an intercom call 25 Answer an incoming call during a PTT call 31 Answer a PTT call 30 Answering system 43 Answer on/off 45 Assign a directory entry to a speed dial location 36 B Base layout 7 Battery charging 4 Battery installation 3 Blind transfer 26 C Call intercept 49 Call screening 45, 49 Call waiting 21 Caller ID 38 Caller ID announce 14 Caller ID log 39 Chain dialing 23 Charging 4 CID time synchronization 17 Clear voicemail indicators 15 Clock 13	Dial mode 18 Directory 32 E Edit a directory entry 35 End a call 19 Equalizer 21 Expand your telephone system 58 F FCC, ACTA and IC regulations 71–72 Find handset 21 Flash 21 H Handset display screen messages 55–56 Handset icons 57 Handset lights 57 Handset lights 57 Handset listening volume 19 Home area code 17 I Icons 57 Important safety instructions 66–67 Installation (battery) 3 Installation (telephone base) 2 Intercom 24 K Key tone 16 L Language 13, 14 LCD language 13 Lights 57 Limited warranty 73–74
D	M
Date and time 13 Delete a directory entry 35 Delete a speed dial entry 37 Delete messages 50, 51, 52 Delete the announcement 44 Delete the caller ID log entries 42 Dial a caller ID log entry 41 Dial a directory entry 34 Dial a speed dial entry 36 Dialing options 40	Maintenance 70 Make a call 19 Make an outgoing call during a PTT call 31 Memory match 39 Memos 53 Message alert tone 47 Message capacity 49 Message playback 50

Index

Message recording time 47 Message window displays 53 Missed call indicator 40 Multiple handset use 24 Mute 20

Ν

New message indication 49 Number of rings 46

Р

Parts checklist 1
Play the announcement 44
Precautions for users of implanted cardiac pacemakers 68
Predial a call 19
PTT on or off 27
PTT to a single handset 28
PTT to multiple handsets 29
Push-to-talk 27

R

Reassign a speed dial number 37 Record an announcement 43 Redial 21–22 Remote access 46, 54 Rename a handset 16 Review the caller ID log 40 Ringer tone 12 Ringer volume 12

S

Safety instructions 66–67 Save a caller ID log entry 41 Search the directory 34 Speakerphone 19

т

Tabletop installation 6
Technical specifications 75

Telephone base layout 7
Telephone base lights 57
Temporary ringer silencing 20
Temporary tone dialing 20
Time 13

ν

Voice language 14 Voicemail 15, 48 Volume 12, 19, 50, 51

w

Wall mount 5 Warranty 72-73 Website 18



VTech Technologies Canada Ltd.

A member of THE VTECH GROUP OF COMPANIES.

VTech is a registered trademark of VTech Holdings Limited.

Specifications are subject to change without notice.

© 2014 VTech Technologies Canada Ltd.

All right reserved. 12/14. LS6425-X_CA_CIB_V5.0

Document order number: 91-004273-050-100

